


**Lupo**  
Made in Italy

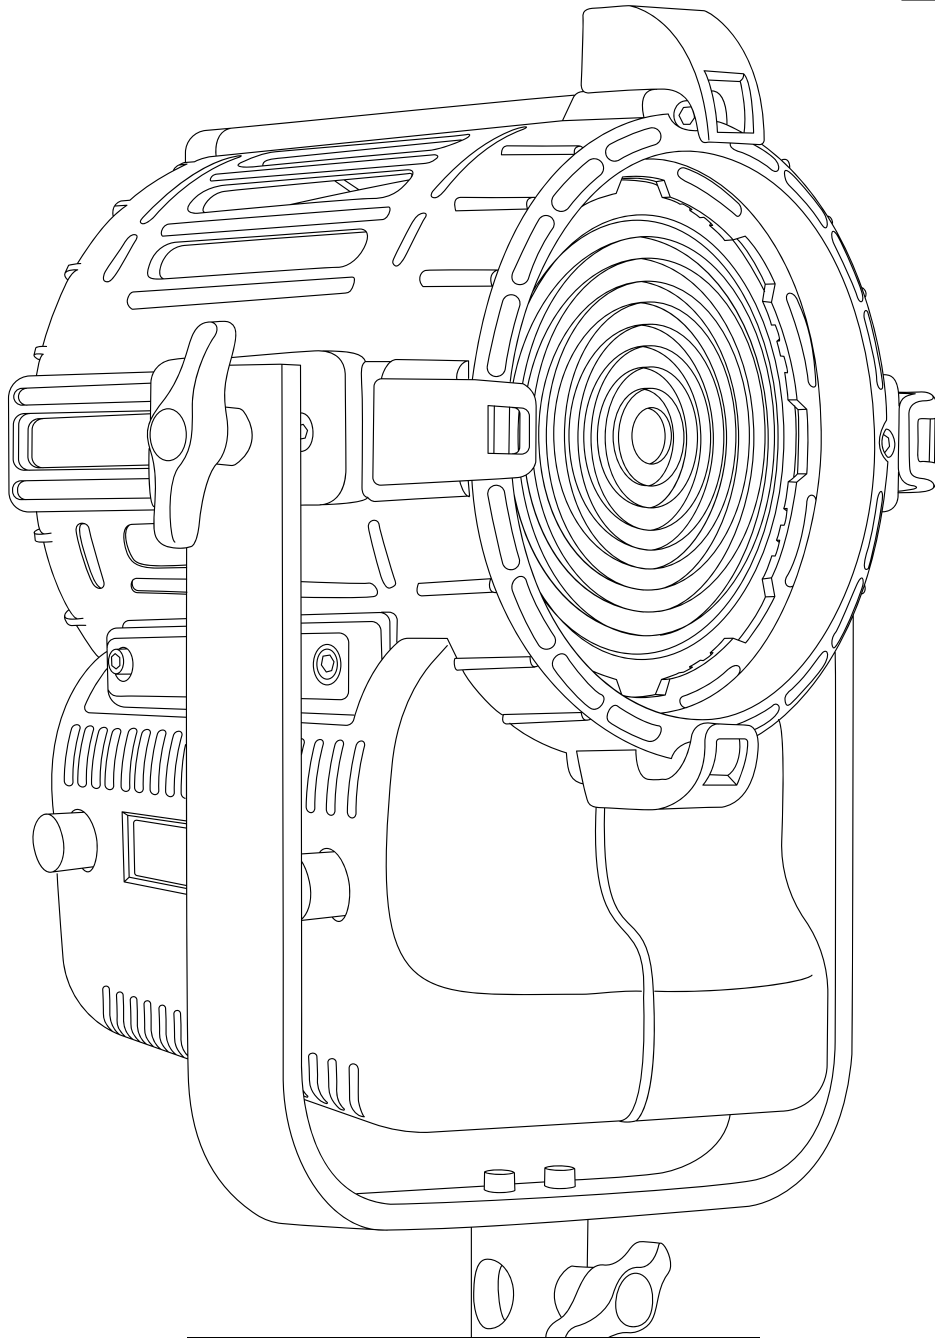

Cod 307 PRO

# Dayled PRO 1000 Full Color

## Technical Data

Dimensions (cm)	212 x 299 x 254 mm
Dimensions (in)	8.3 x 11.7 x 10 in
Weight (kg)	5 kg
Weight (lb)	11 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	95
Estimated LED lifetime (L80)	50,000 hours
LED COB	110 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	110 W
Watt output (equivalent to tungsten)	1000 W
Fresnel lens	150 mm
Firmware upgrades	through USB port
Colour temperature	2800 K - 10000 K
Voltage AC	90 V - 240 V
Light beam	10° - 60°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

## Photometric data

Distance	6500 K		5600 K		3200 K	
	spot	flood	spot	flood	spot	flood
Lux at 1 m - 3.2 ft	27000	4380	26800	4300	25000	4150
Lux at 2 m - 6.5 ft	7200	1100	7100	1060	6800	1040
Lux at 3 m - 9.8 ft	3330	515	3250	500	3060	490
Lux at 4 m - 13.1 ft	1910	305	1840	300	1760	295
Lux at 5 m - 16.4 ft	1230	215	1200	206	1140	205

# Mode Options

## **CCT (Correlated Color Temperature)**

Mode for variable color temperature control from 2700 K to 10000 K with the addition of plus and minus green/magenta offset.

---

## **HSI (Hue, Saturation and Intensity)**

Mode for full color control.

---

## **RGBW**

Mode for control of Red, Green, Blue and White independently.

---

## **Preset**

Mode for a selected variety of gels.

---

# Technical Drawing

