


Lupo
Made in Italy

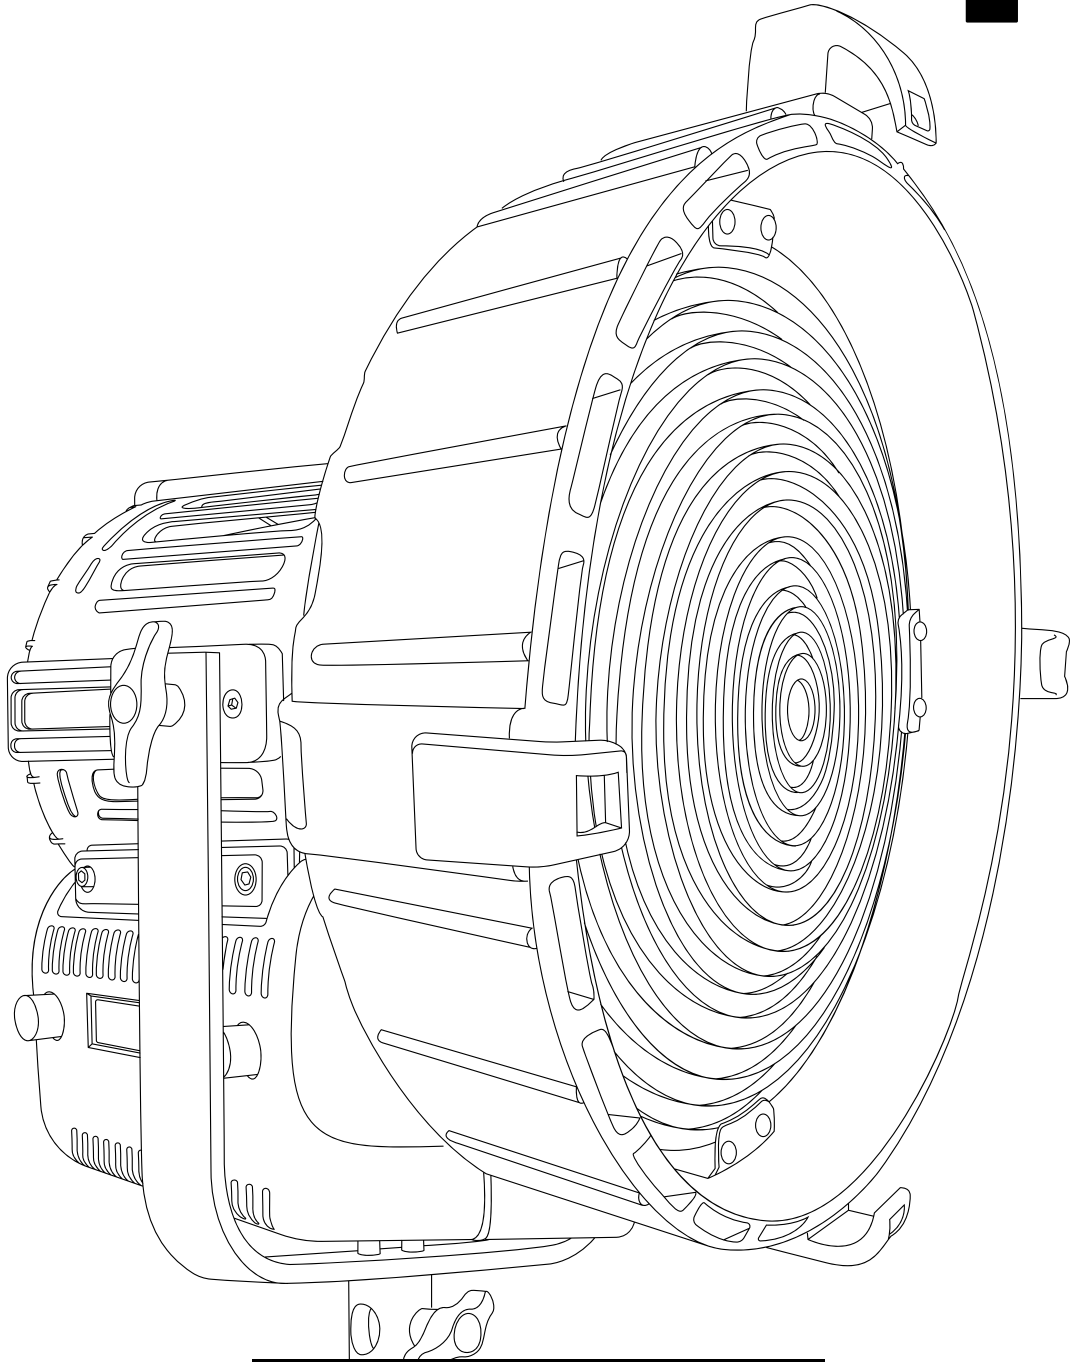

Cod 306 T PRO

**DayledPRO 3000
3200 K**





Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	5600 K - daylight balanced
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96





Photometric data

Distance	3200 K	
	spot	flood
Lux at 1 m - 3.2 ft	-	-
Lux at 2 m - 6.5 ft	36000	5100
Lux at 3 m - 9.8 ft	16000	2400
Lux at 4 m - 13.1 ft	9200	1400
Lux at 5 m - 16.4 ft	5800	940


Technical Drawing

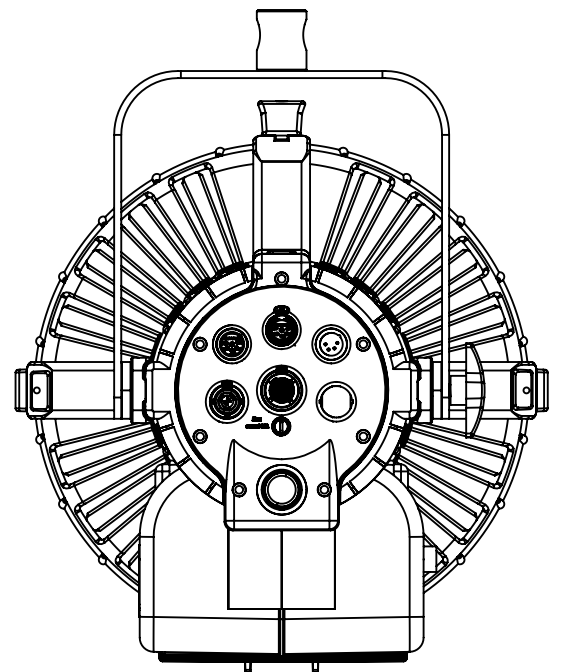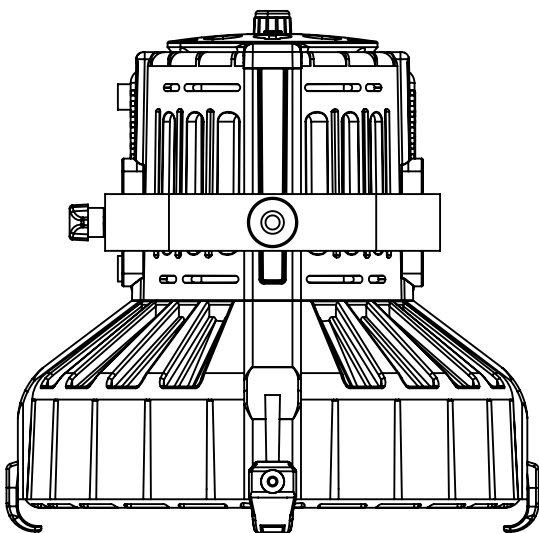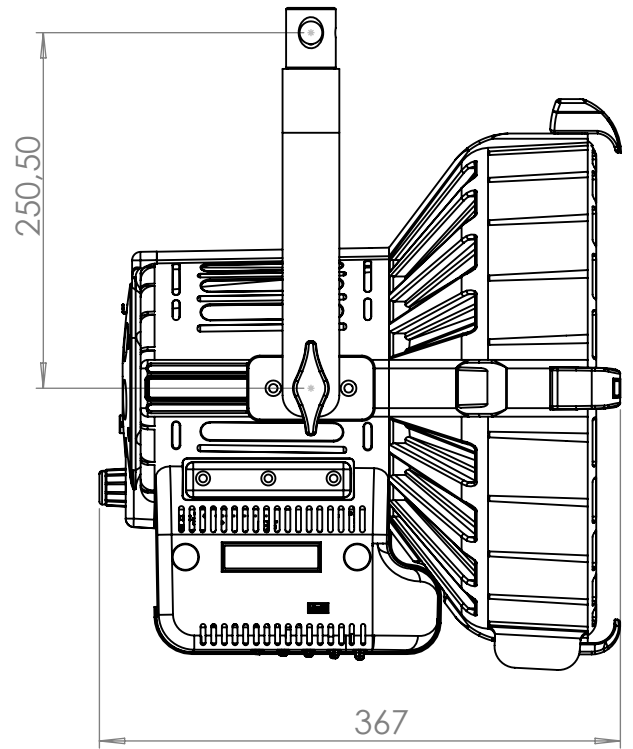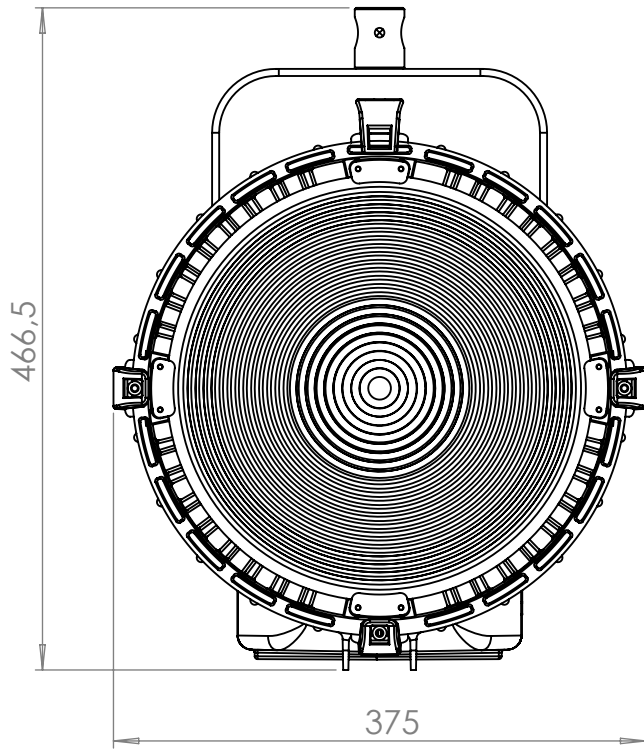

Pole operated yoke

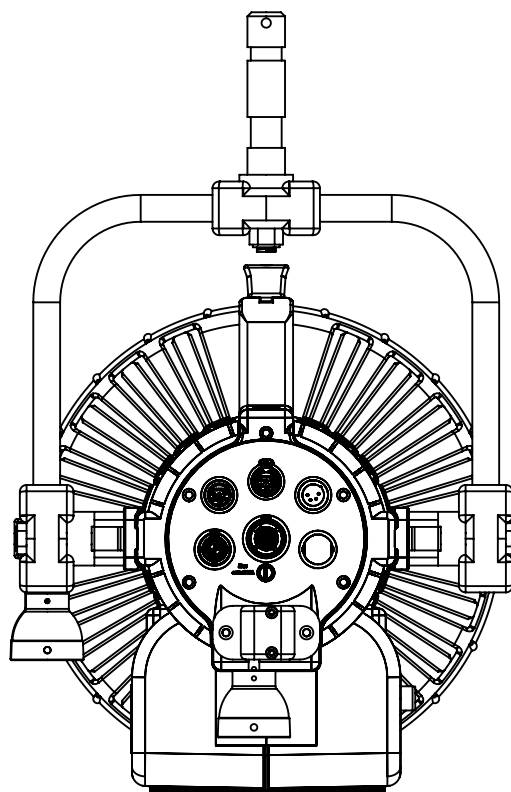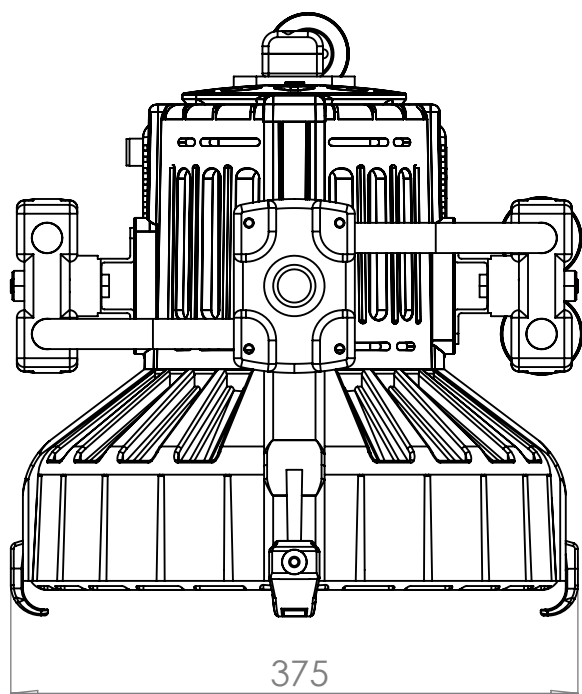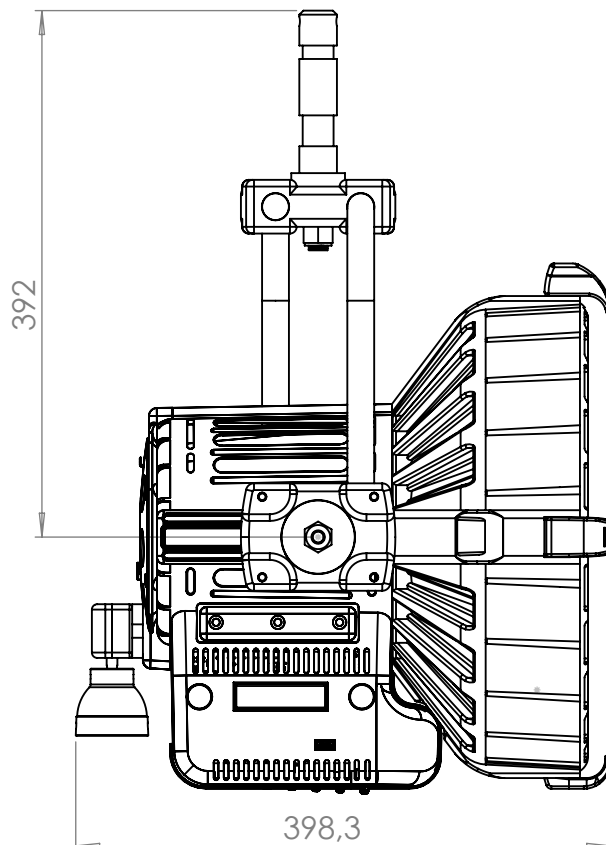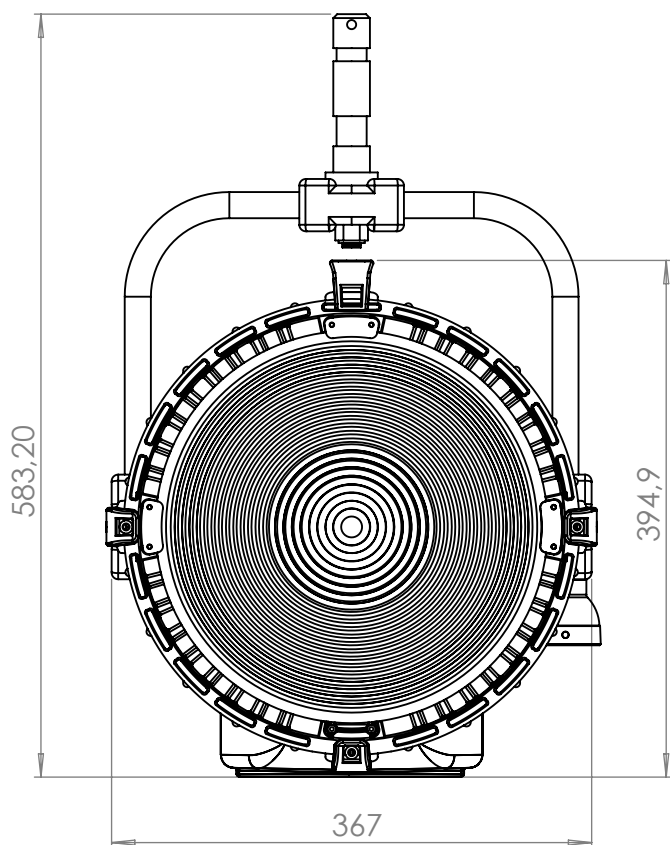

Lupo
Made in Italy

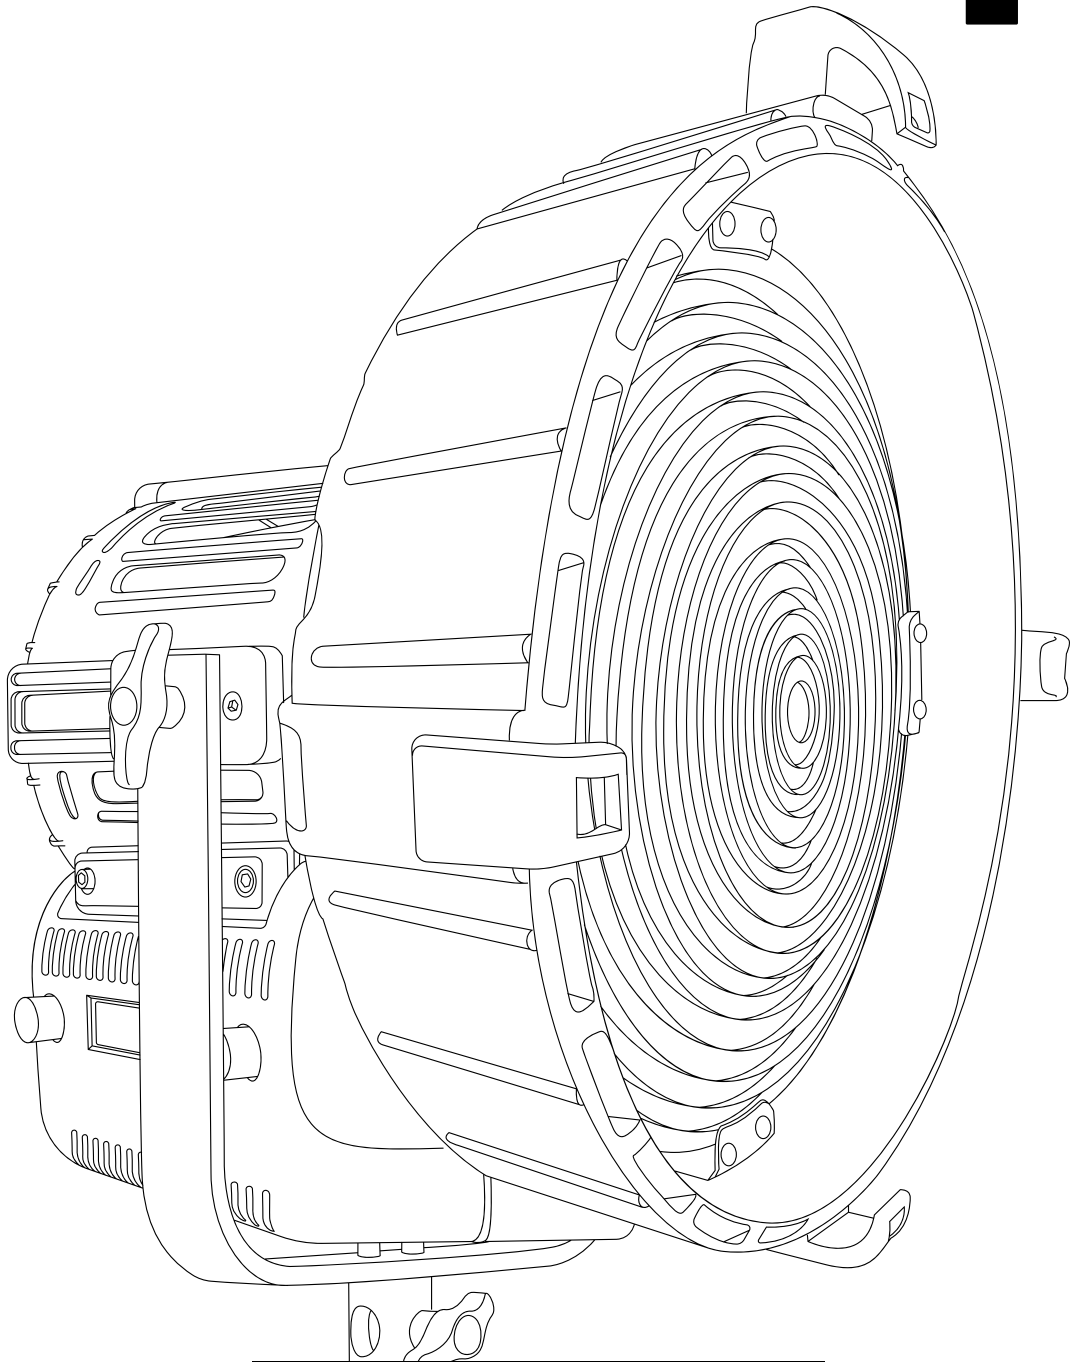

Cod 304 D PRO

DayledPRO 3000
5600 K





Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	5600 K - daylight balanced
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

Photometric data

Distance	5600 K	
	spot	flood
Lux at 1 m - 3.2 ft	-	-
Lux at 2 m - 6.5 ft	47000	6400
Lux at 3 m - 9.8 ft	21000	3100
Lux at 4 m - 13.1 ft	12000	1800
Lux at 5 m - 16.4 ft	7500	1200

Technical Drawing

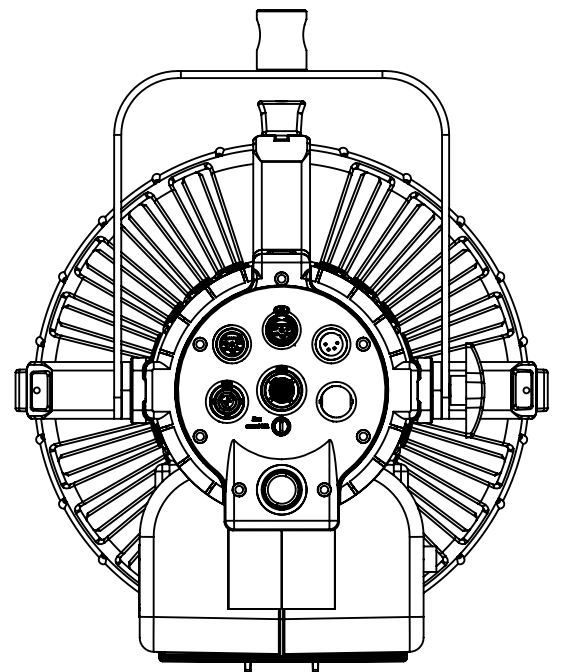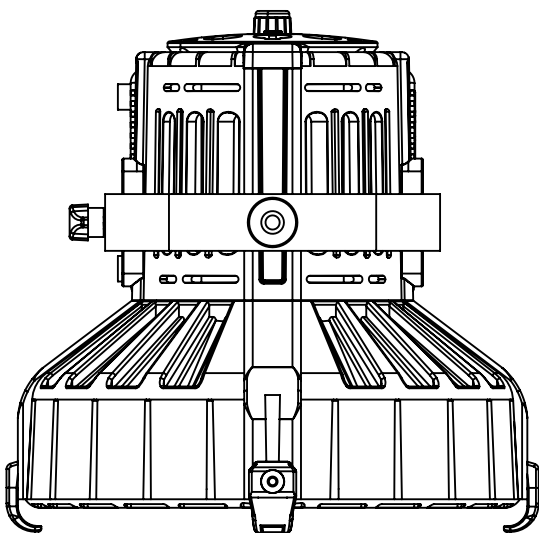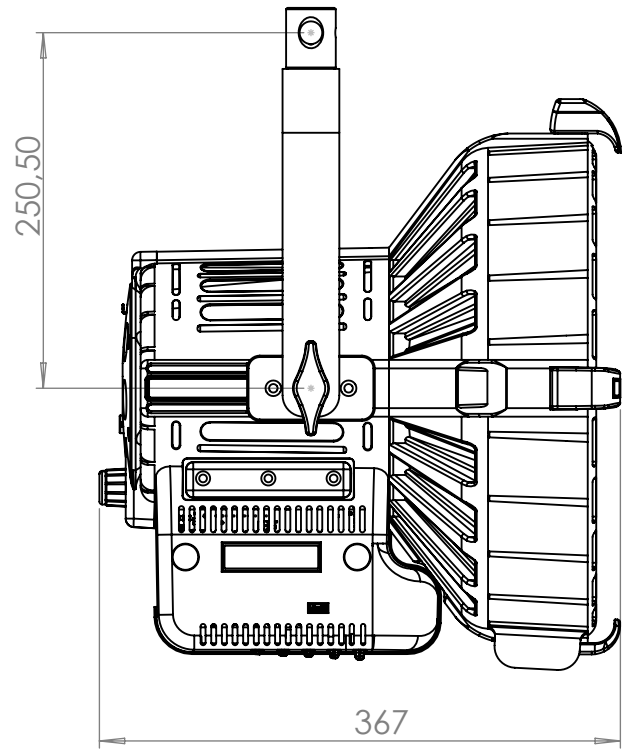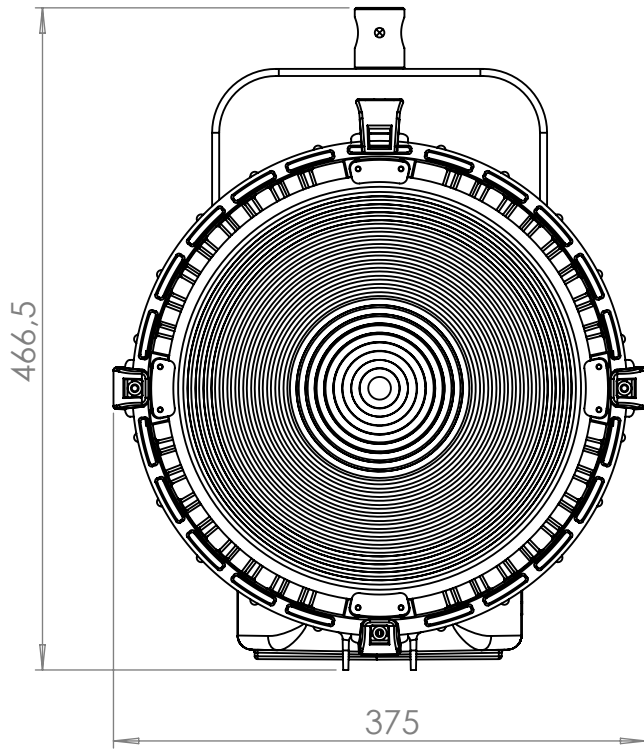

Pole operated yoke

