


**Lupo**  
Made in Italy

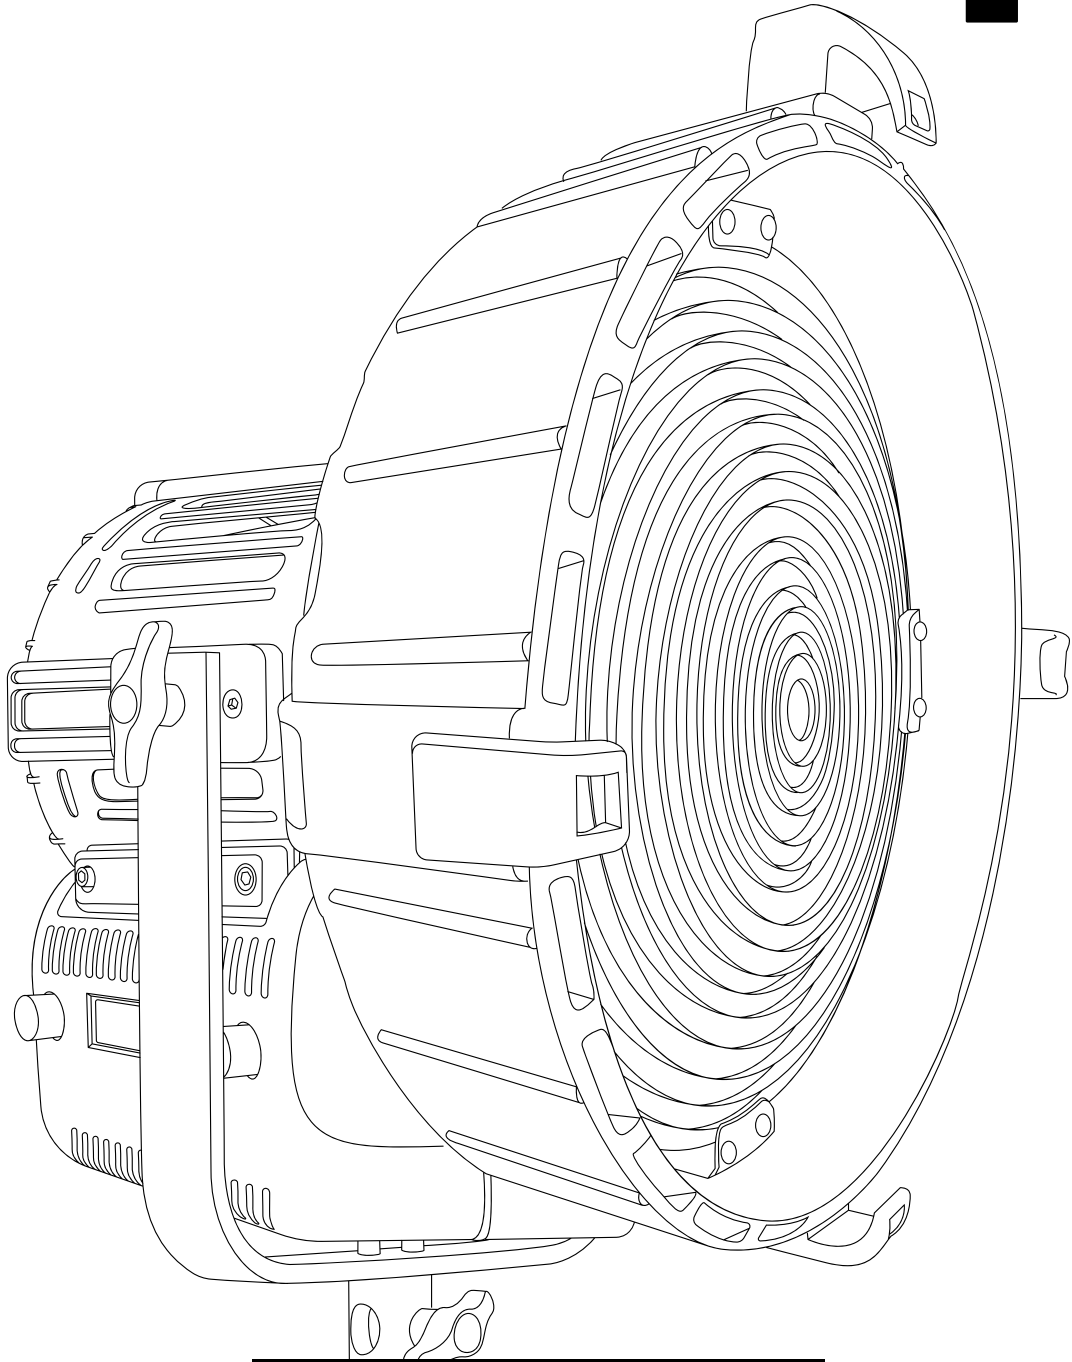

Cod 306 T PRO

**DayledPRO 3000**  
**3200 K**





## Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	5600 K - daylight balanced
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96





## Photometric data

Distance	3200 K	
	spot	flood
Lux at 1 m - 3.2 ft	-	-
Lux at 2 m - 6.5 ft	36000	5100
Lux at 3 m - 9.8 ft	16000	2400
Lux at 4 m - 13.1 ft	9200	1400
Lux at 5 m - 16.4 ft	5800	940


# Technical Drawing

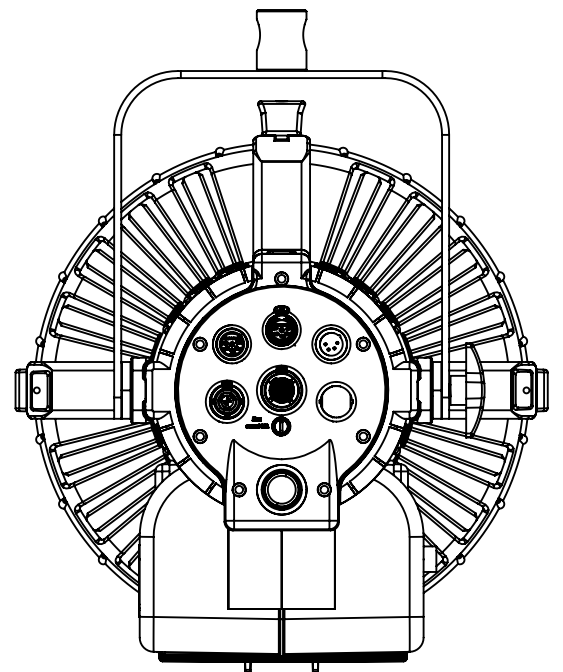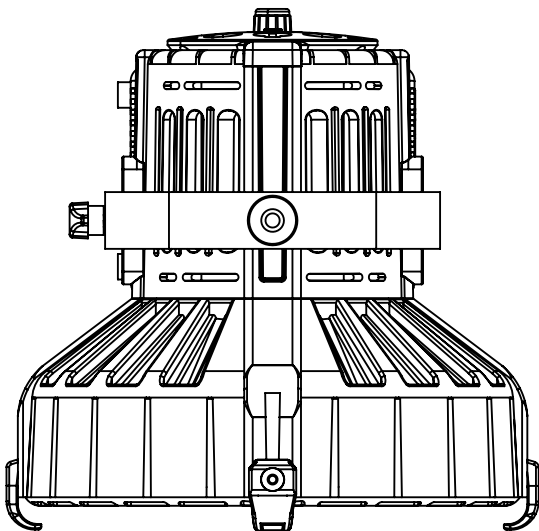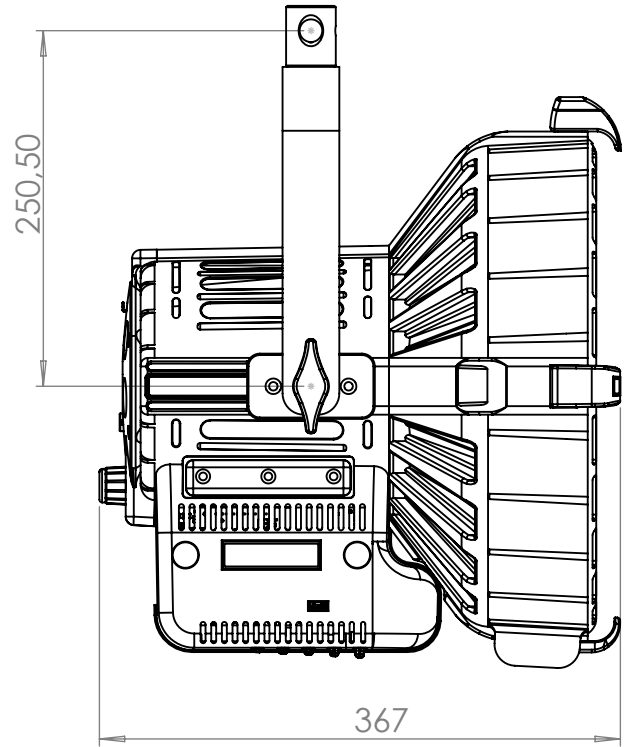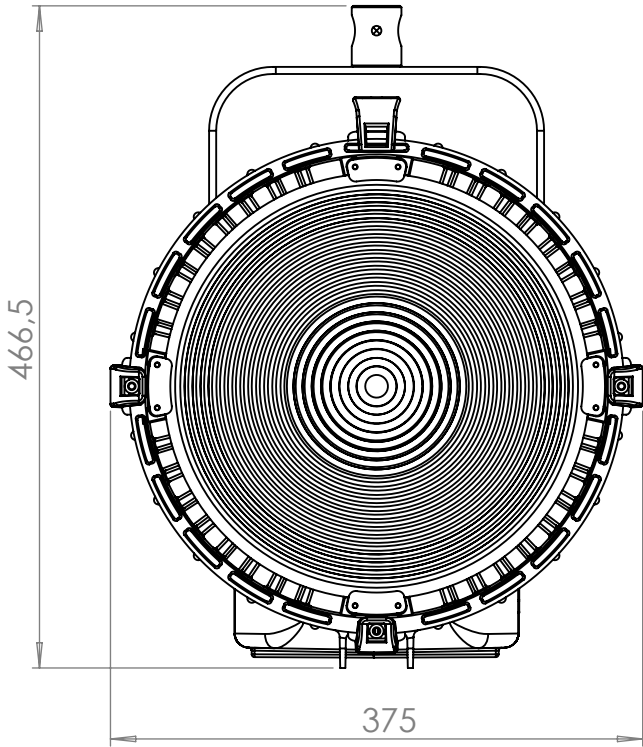

## Pole operated yoke

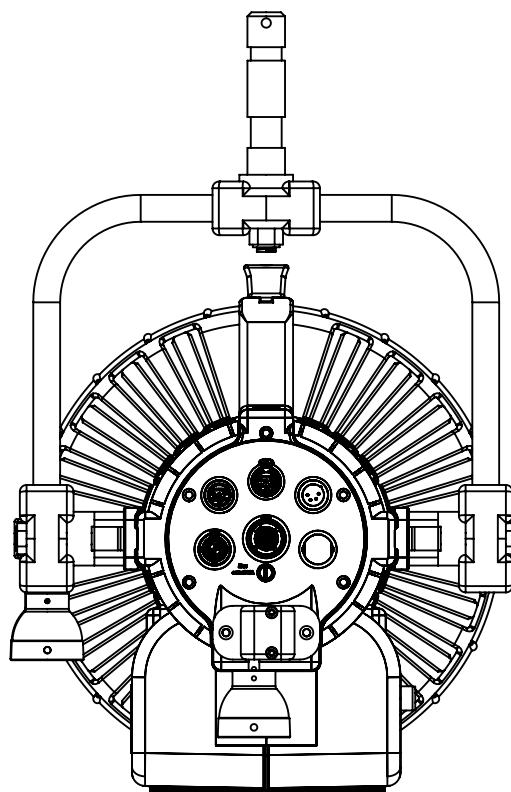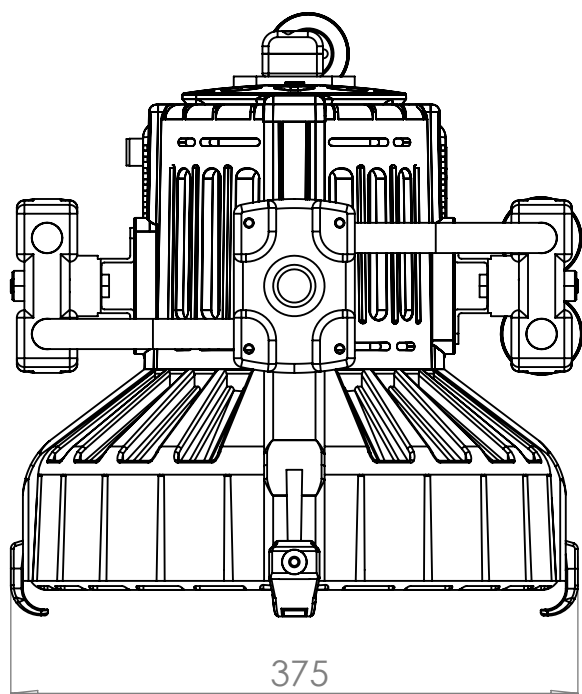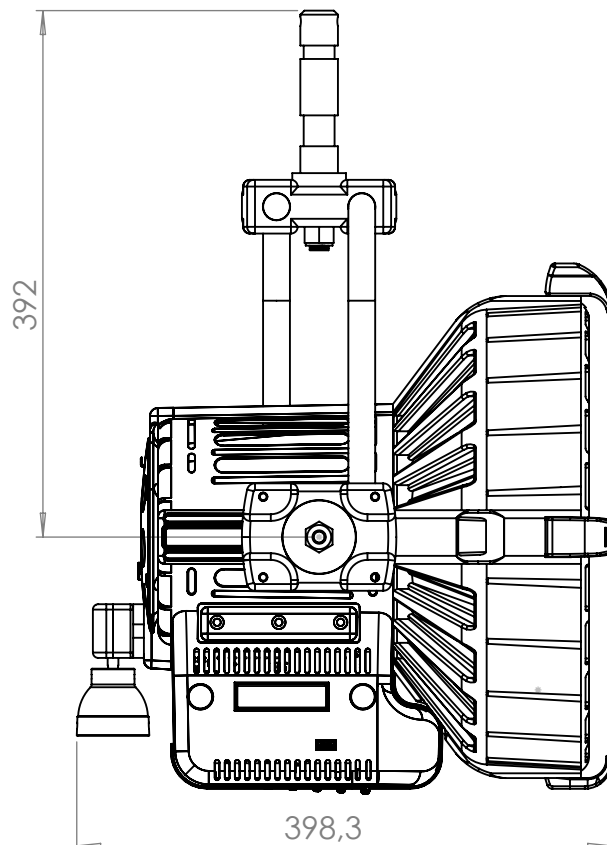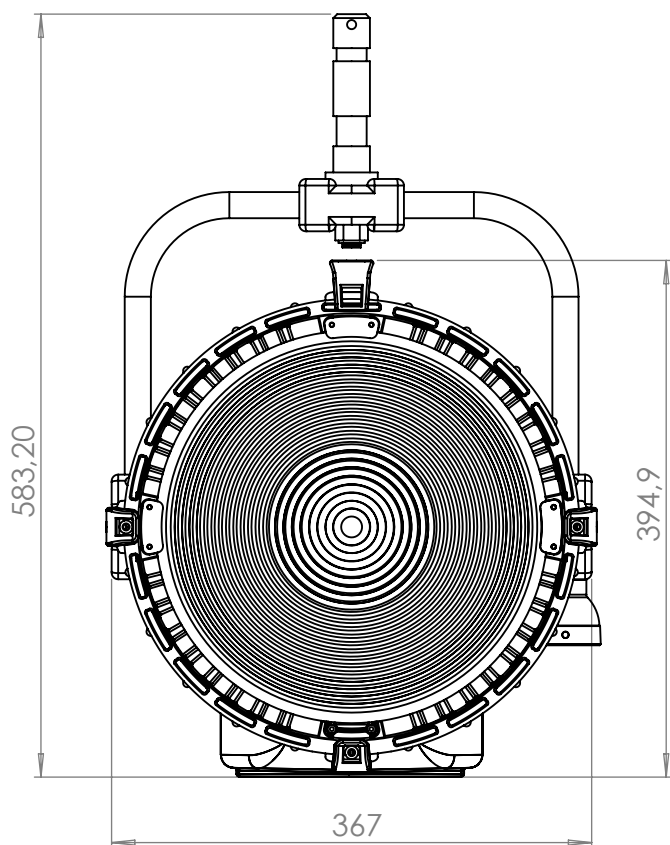

**Lupo**  
Made in Italy

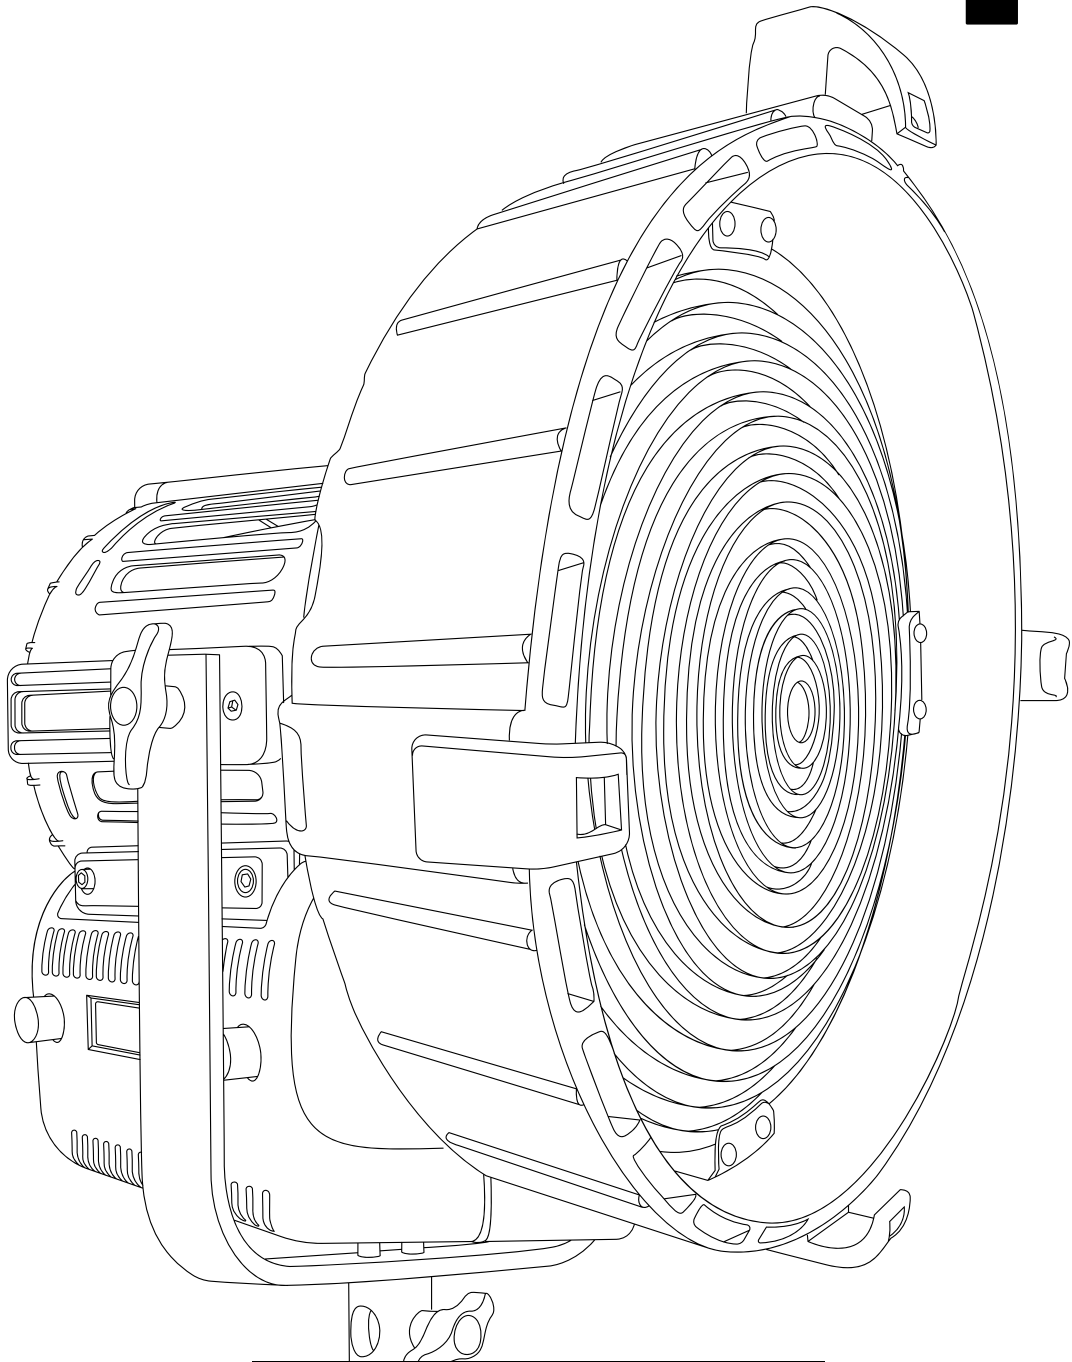

Cod 304 D PRO

**DayledPRO 3000**  
**5600 K**





## Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	5600 K - daylight balanced
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96





## Photometric data

Distance	5600 K	
	spot	flood
Lux at 1 m - 3.2 ft	-	-
Lux at 2 m - 6.5 ft	47000	6400
Lux at 3 m - 9.8 ft	21000	3100
Lux at 4 m - 13.1 ft	12000	1800
Lux at 5 m - 16.4 ft	7500	1200

# Technical Drawing

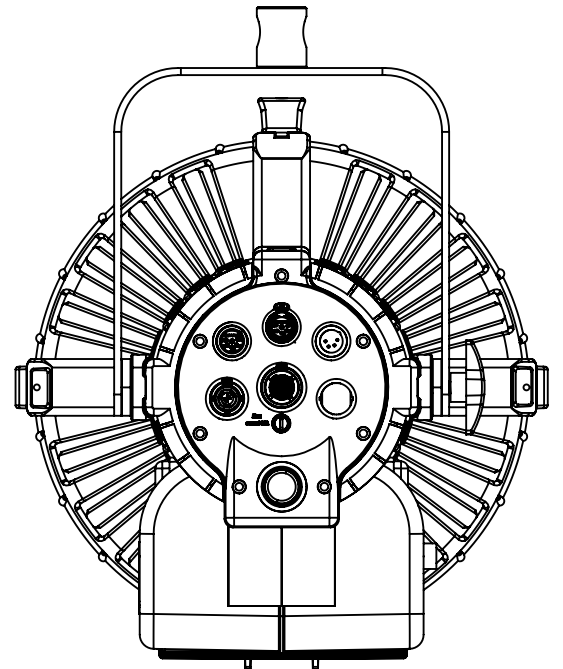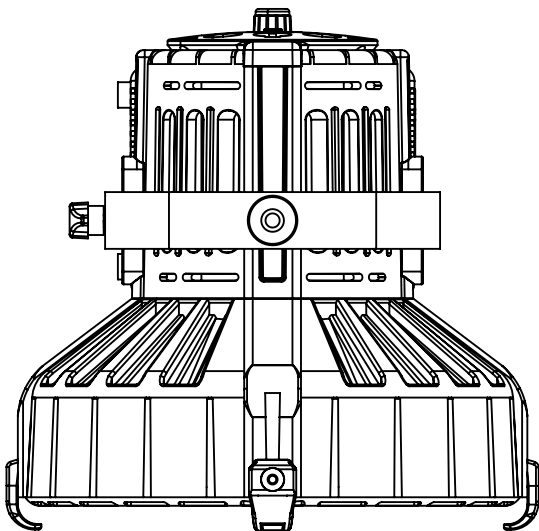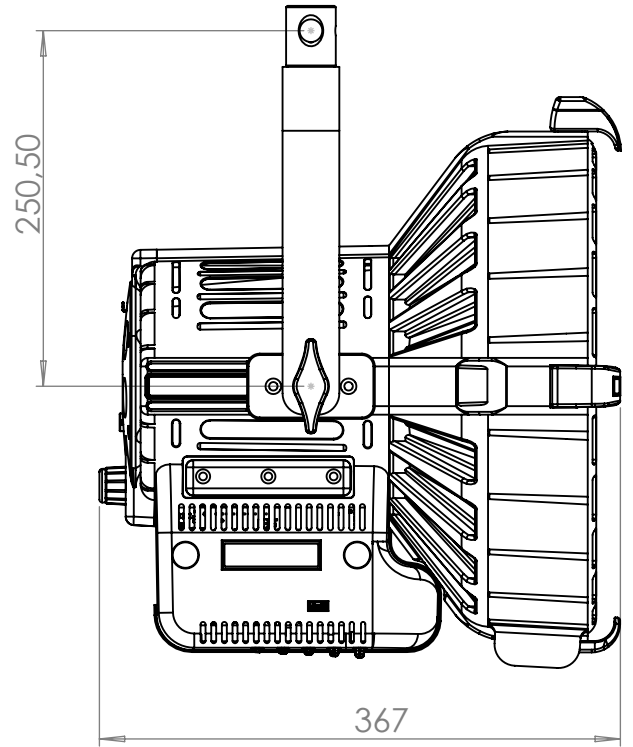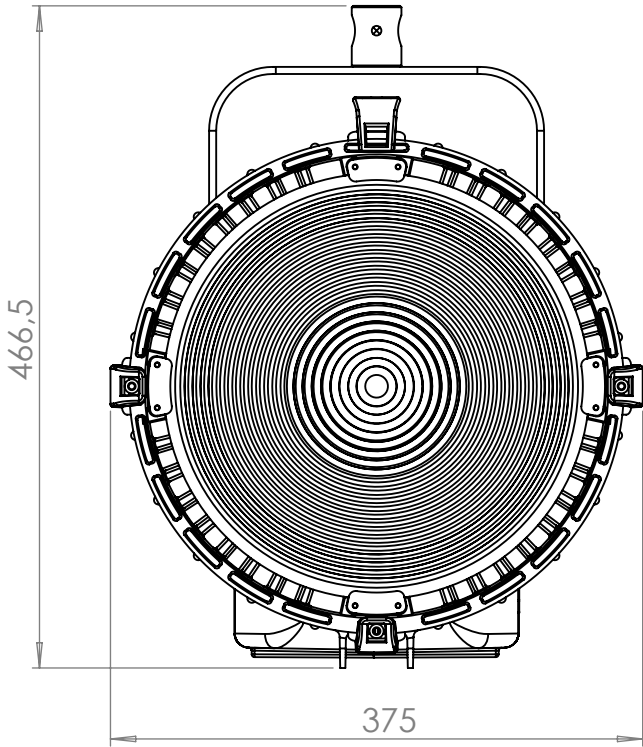


## Pole operated yoke

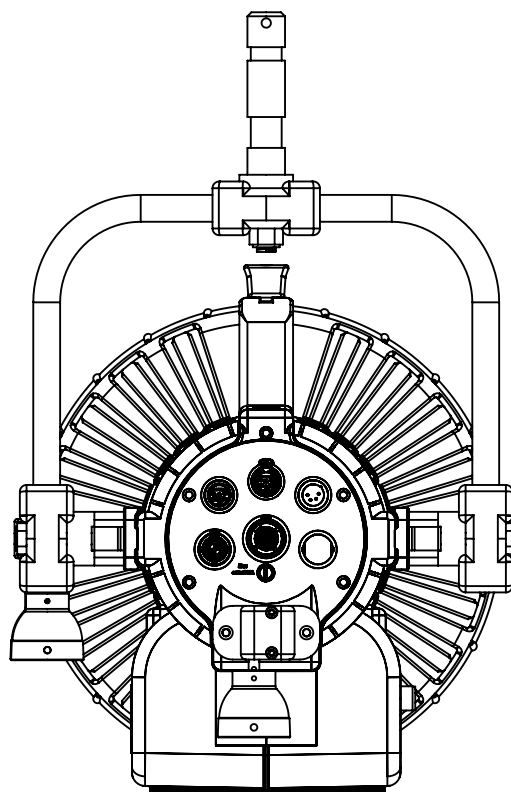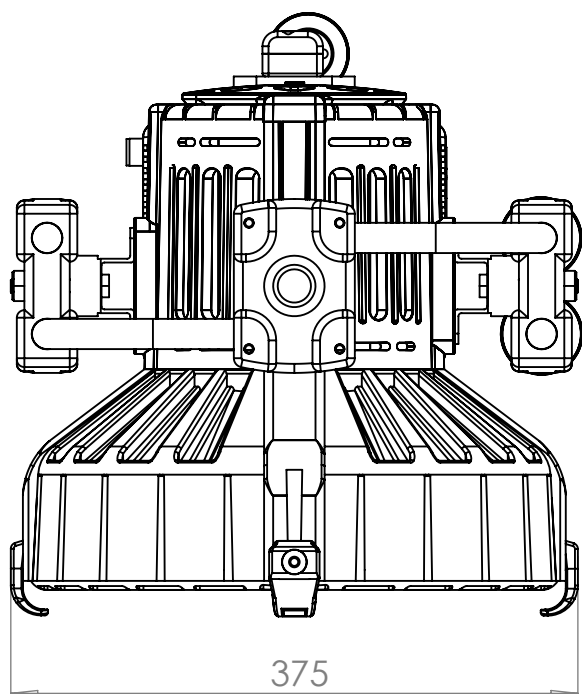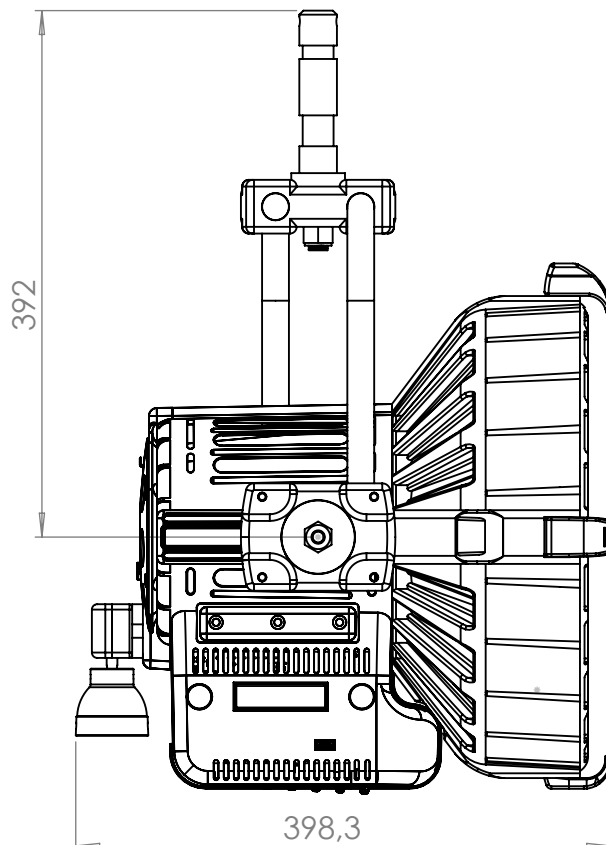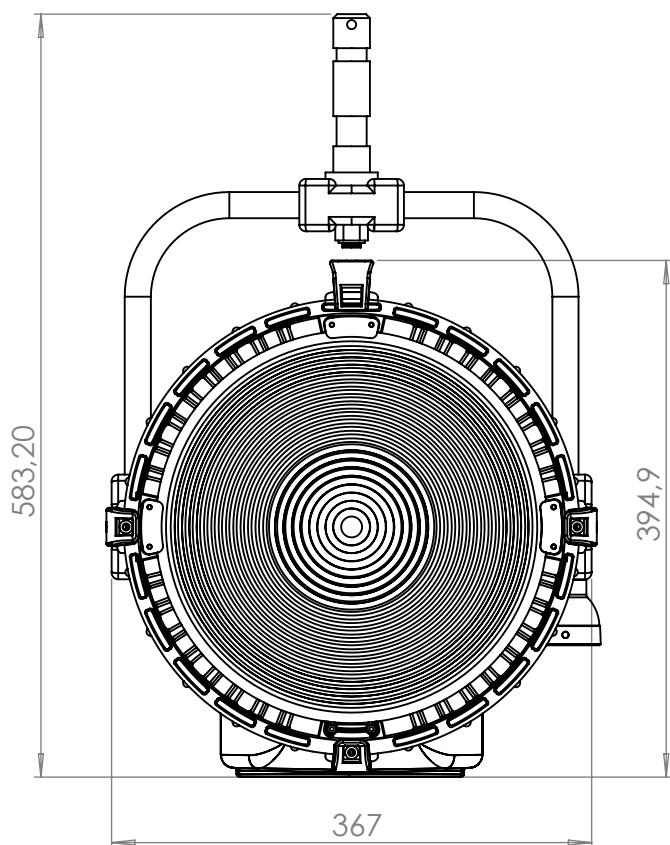



**Lupo**  
Made in Italy

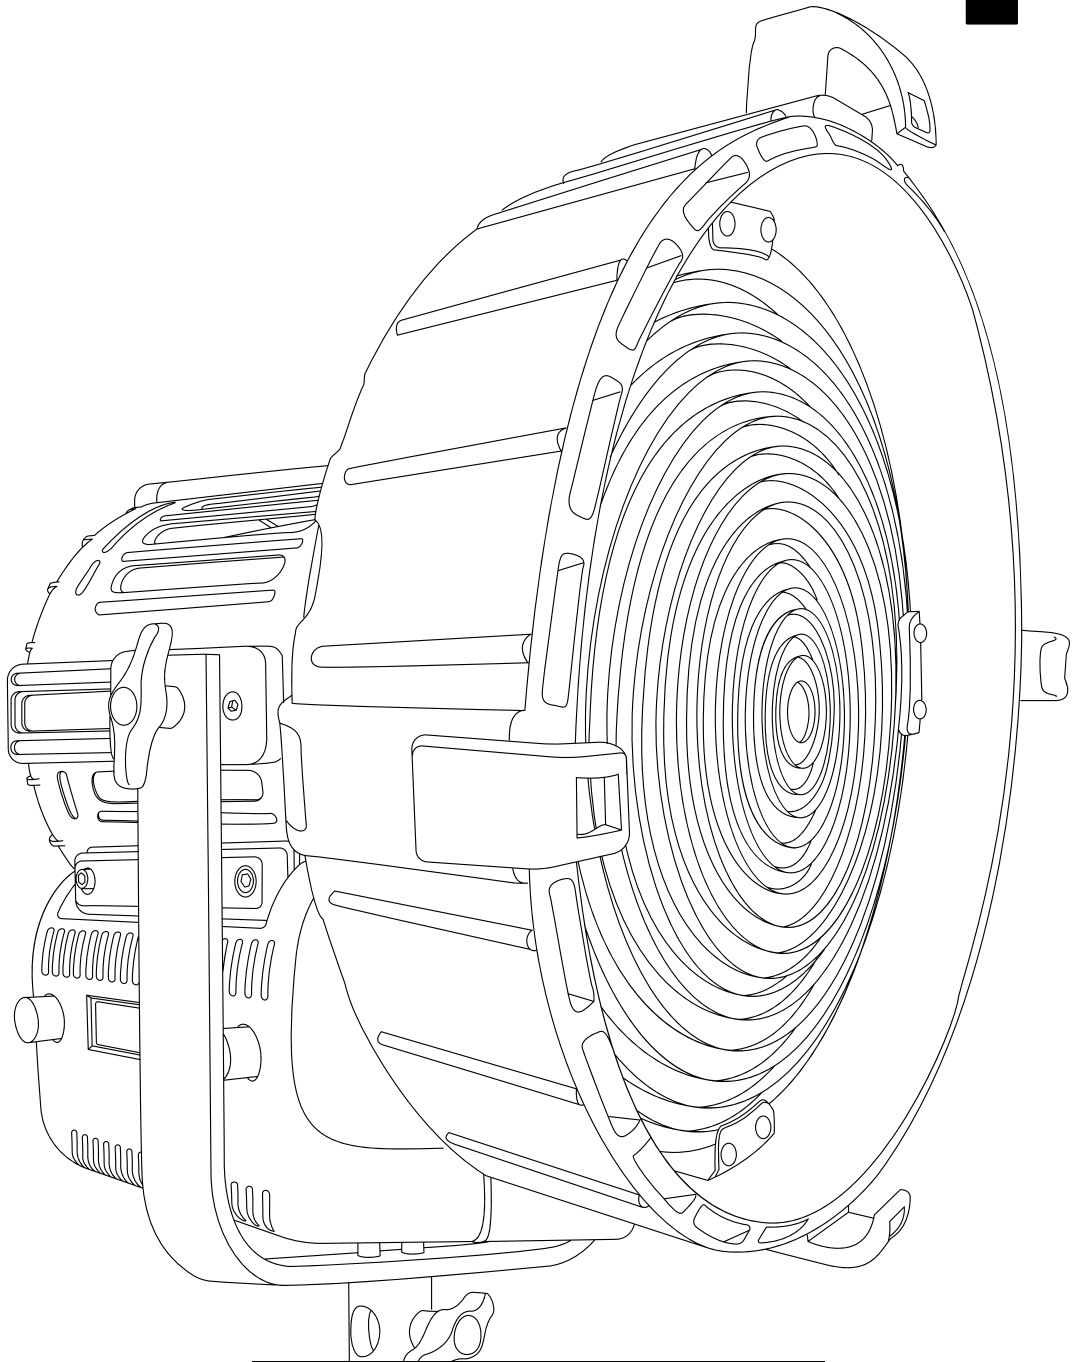

---

**Cod 307 PRO**

# **DayledPRO 3000**





## **Dual Color**

## Technical Data





Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR	included
4 pin connector (pin 1: negative / pin 4: positive)	
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	2800 K - 6500 K
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

Photometric data	6500 K		5600 K		3200 K	
	spot	flood	spot	flood	spot	flood
Distance						
Lux at 1 m - 3.2 ft	-	-	-	-	-	-
Lux at 2 m - 6.5 ft	50000	6700	47000	6400	36000	5100
Lux at 3 m - 9.8 ft	22500	3200	21000	3100	16000	2400
Lux at 4 m - 13.1 ft	12800	1900	12000	1800	9200	1400
Lux at 5 m - 16.4 ft	8150	1260	7500	1200	5800	940


# Technical Drawing

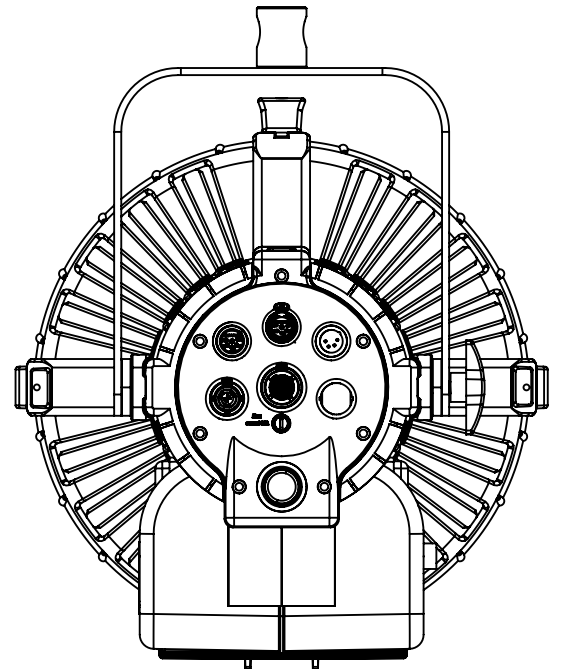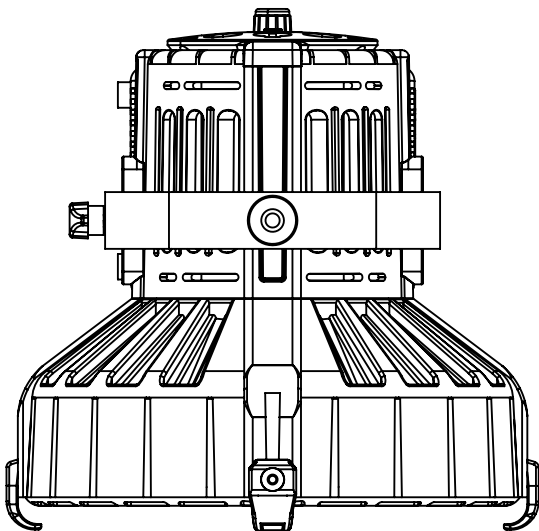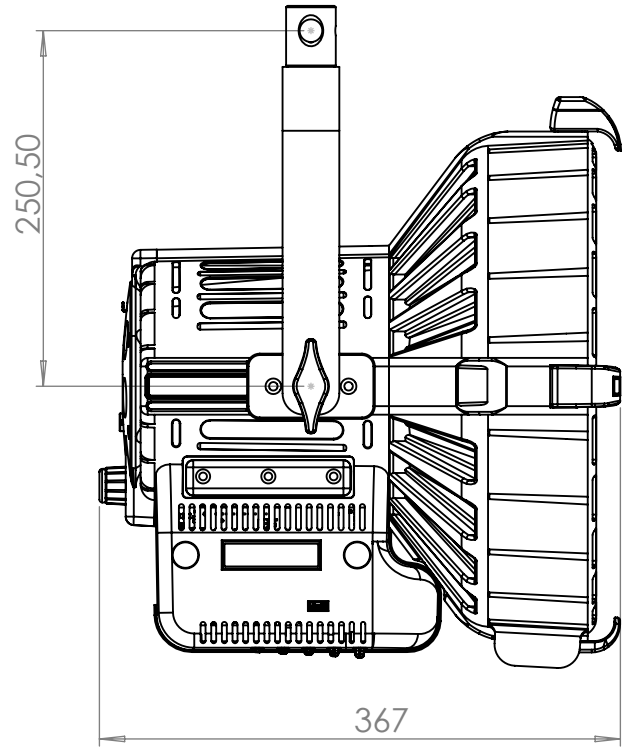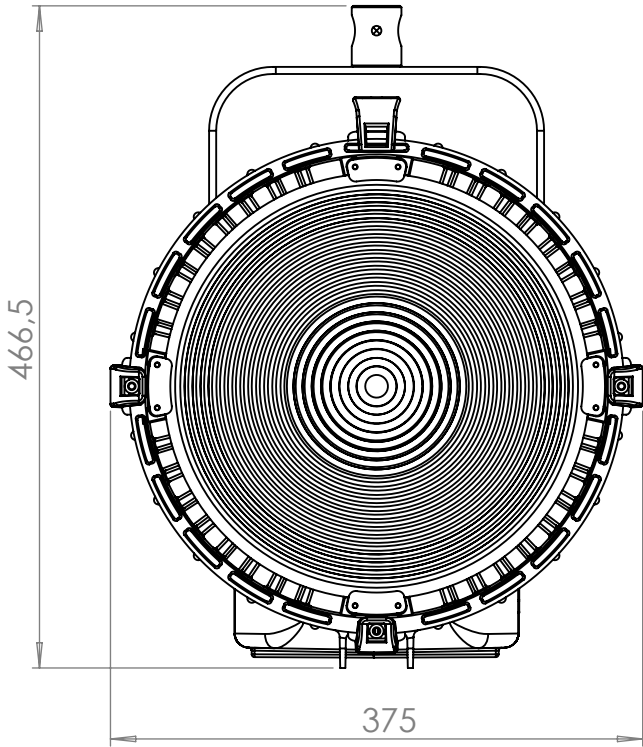

## Pole operated yoke

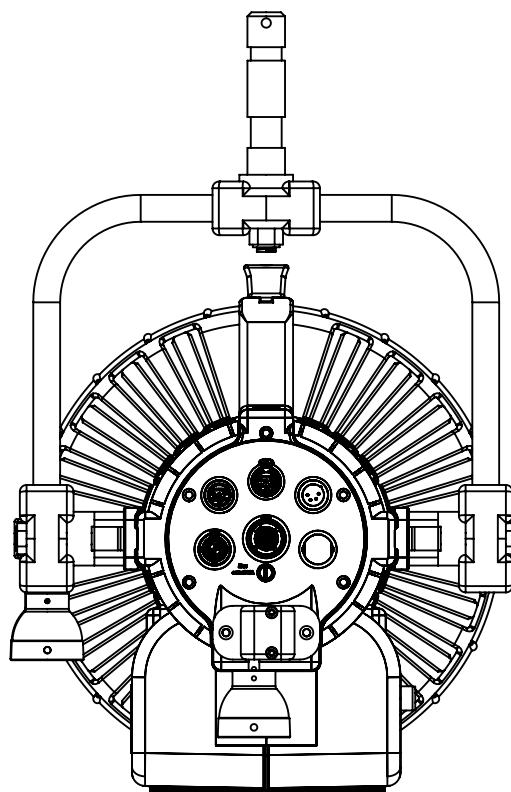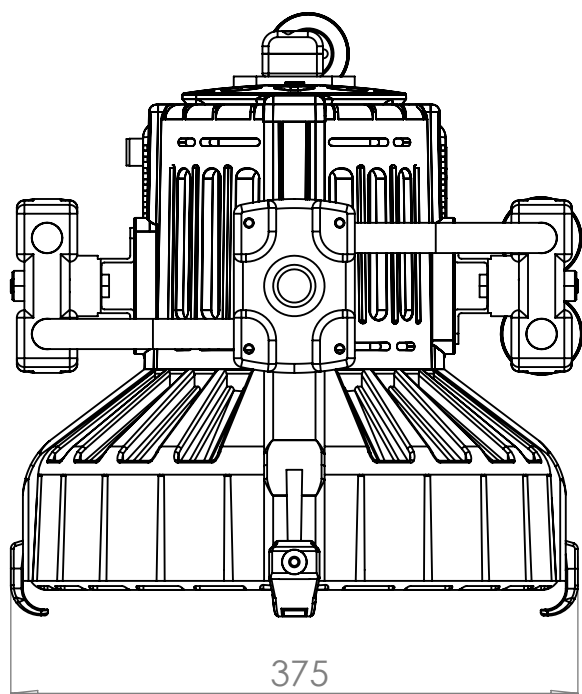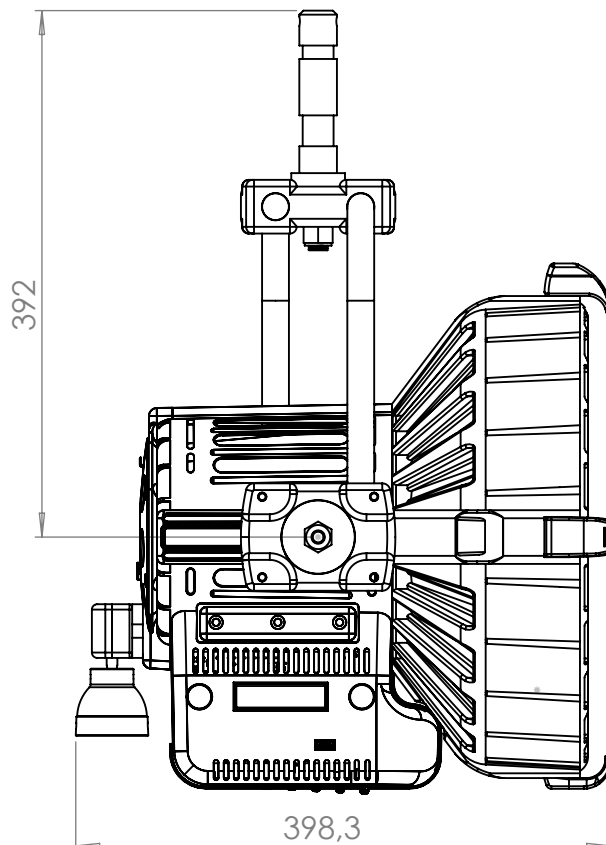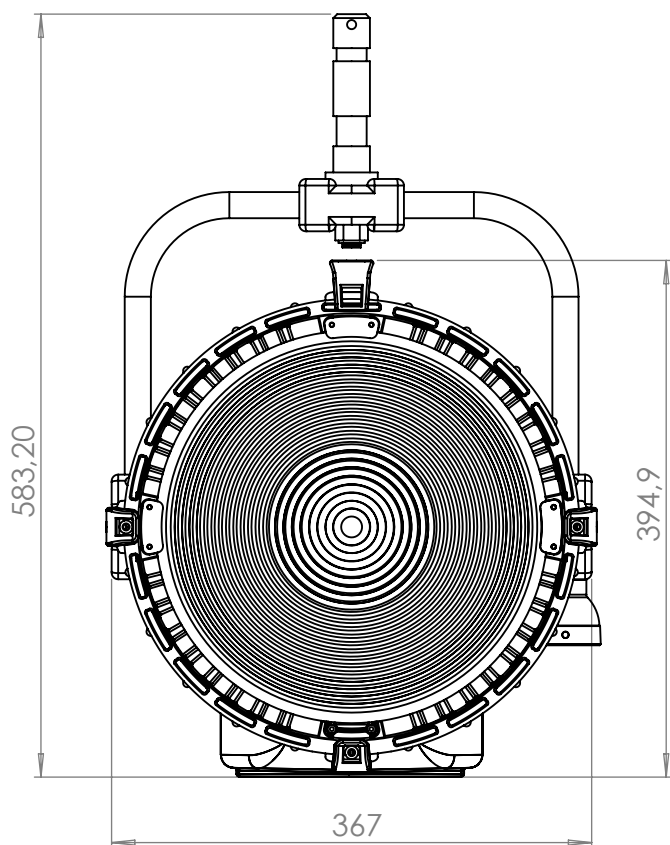

**Lupo**  
Made in Italy

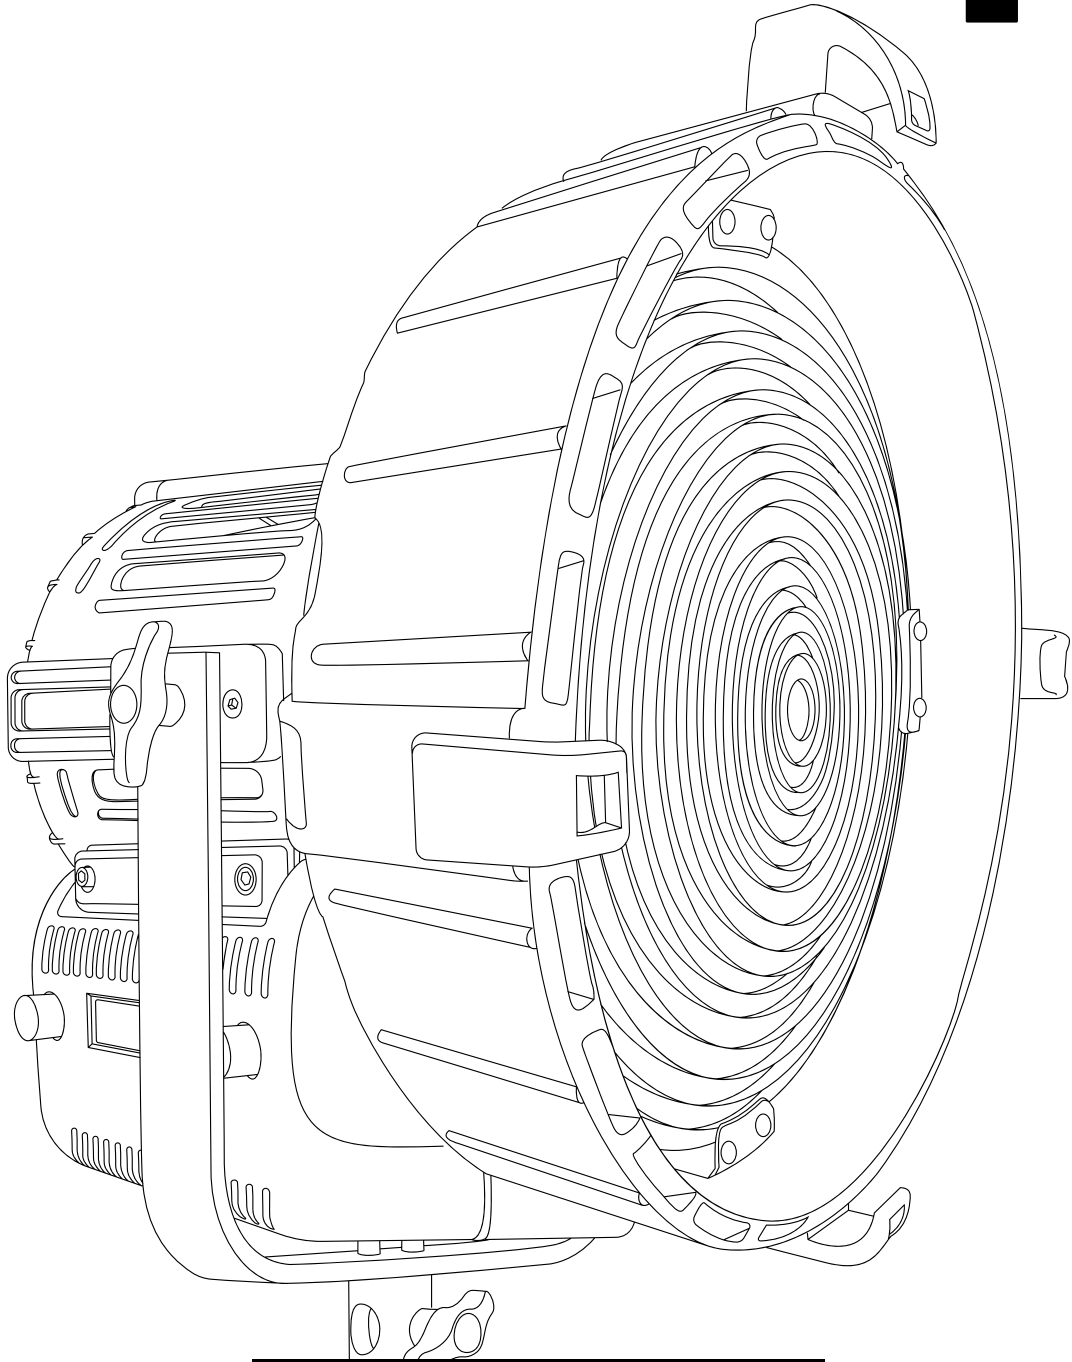

Cod 310 PRO

**DayledPRO 3000**  
**Full Color**

## Technical Data

Dimensions (mm)	466,5 x 375 x 367 mm
Dimensions (in)	18.3 x 14.7 x 14.4 in
Weight (kg)	7,8 kg
Weight (lb)	17.1 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	99
Estimated LED lifetime (L80)	50,000 hours
LED COB	350 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR	included
4 pin connector (pin 1: negative / pin 4: positive)	
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	330 W
Watt output (equivalent to tungsten)	3000 W
Fresnel lens	300 mm
Firmware upgrades	through USB port
Colour temperature	2800 K - 10000 K
Voltage AC	90 V - 240 V
Light beam	10° - 55°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

Photometric data	6500 K		5600 K		3200 K	
	spot	flood	spot	flood	spot	flood
Distance						
Lux at 1 m - 3.2 ft	-	-	-	-	-	-
Lux at 2 m - 6.5 ft	31500	4700	30000	4600	29000	4500
Lux at 3 m - 9.8 ft	14800	2280	14500	2220	13700	2150
Lux at 4 m - 13.1 ft	8200	1340	8000	1300	7650	1250
Lux at 5 m - 16.4 ft	5150	880	5100	860	4900	850

# Mode Options

## **CCT (Correlated Color Temperature)**

Mode for variable color temperature control from 2700 K to 10000 K with the addition of plus and minus green/magenta offset.

---

## **HSI (Hue, Saturation and Intensity)**

Mode for full color control.

---

## **RGBW**

Mode for control of Red, Green, Blue and White independently.





---

## **Preset**

Mode for a selected variety of gels.

---

# Technical Drawing

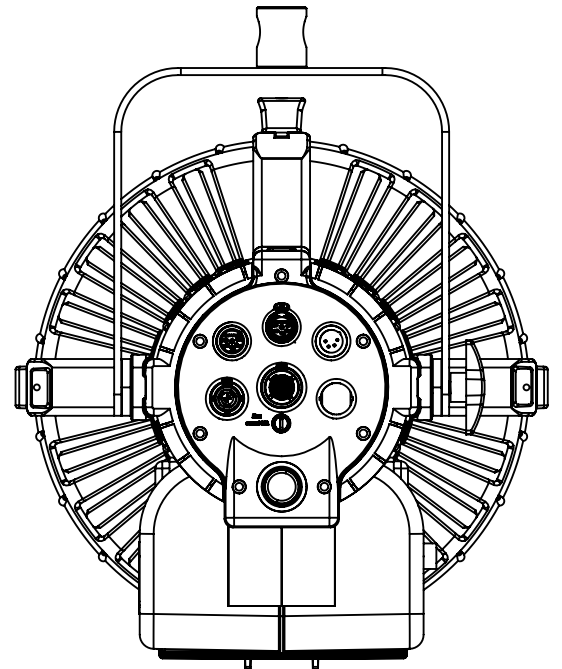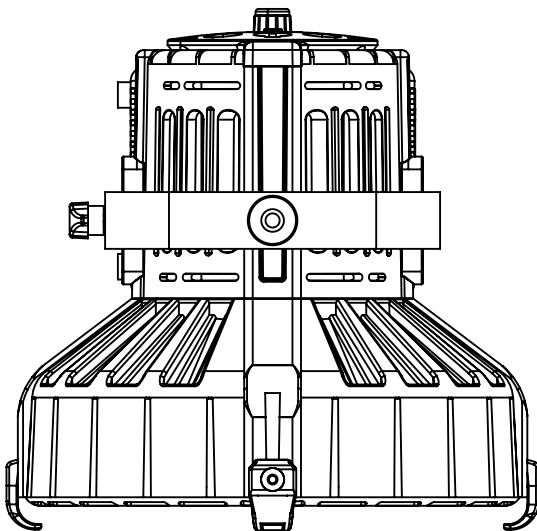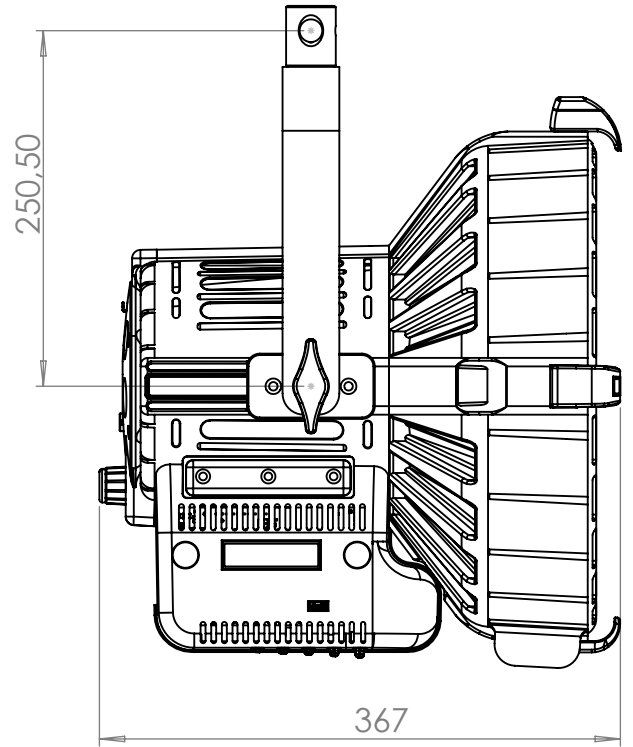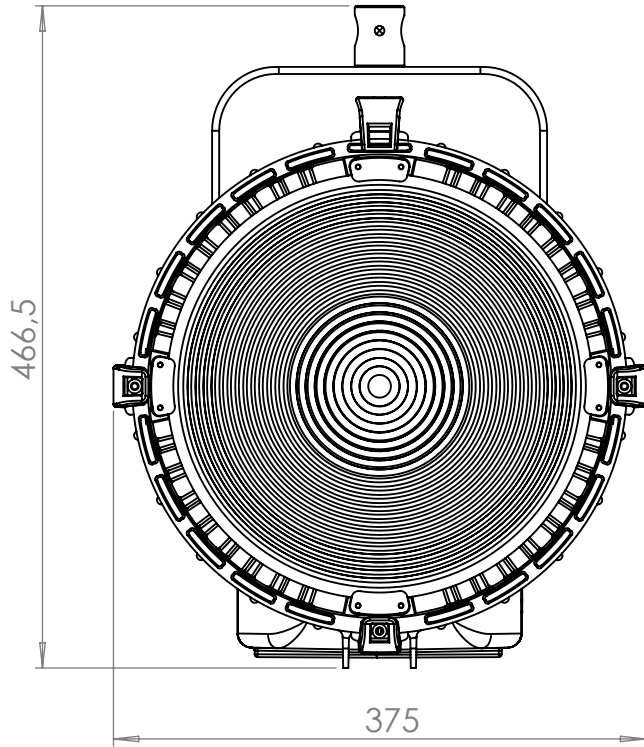



## Pole operated yoke

