


Lupo
Made in Italy

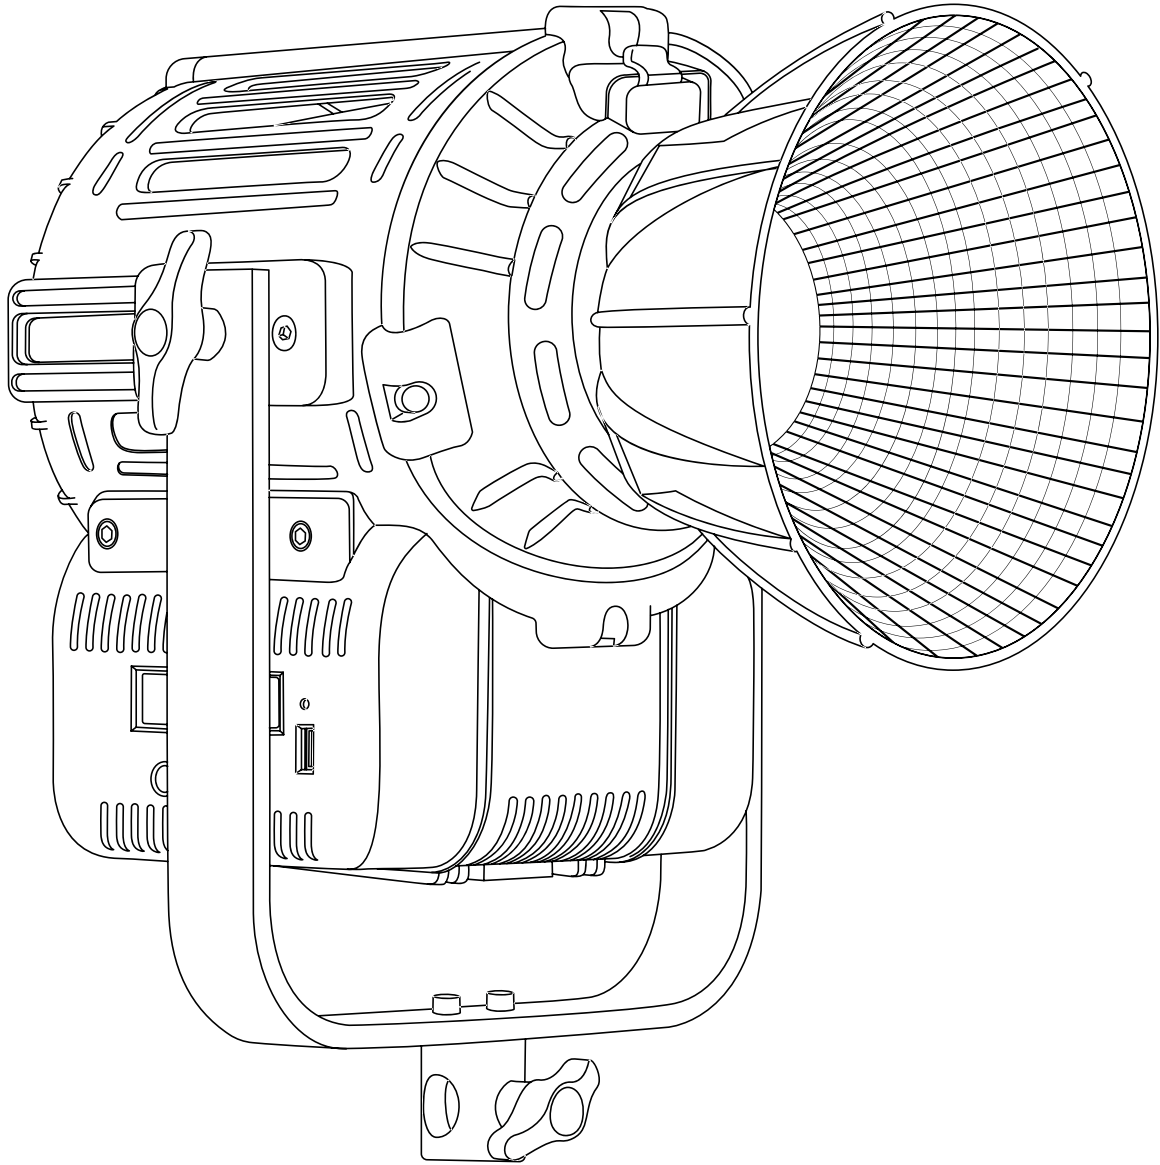

Cod 900

MovielightPRO 300





Technical Data

Dimensions (cm)	212 x 274 x 352 mm
Dimensions (in)	8.3 x 10.7 x 13.8 in
Weight (kg)	5 kg
Weight (lb)	11 lb
CRI (Colour Rendering Index)	96
TLCI (Television Lighting Consistency Index)	98
Estimated LED lifetime (L80)	50,000 hours
LED COB	200 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Bluetooth Long Range	included
Accessory type	Bowens Mount
Parabolic Hyper Reflector	included
Watt consumption	220 W
Firmware upgrades	through USB port
Colour temperature	5600 K
Voltage AC	90 V - 240 V
Voltage DC	14.8 V
Light beam	85° (bare bulb) - 55° (with hyper reflector)
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power factor	0.96

Photometric data

Distance	5600 K	
	bare bulb	hyper reflector
Lux at 1 m - 3.2 ft	13900	39000
Lux at 2 m - 6.5 ft	3450	7800
Lux at 3 m - 9.8 ft	1580	3250
Lux at 4 m - 13.1 ft	870	1700
Lux at 5 m - 16.4 ft	550	1080

Technical Drawing

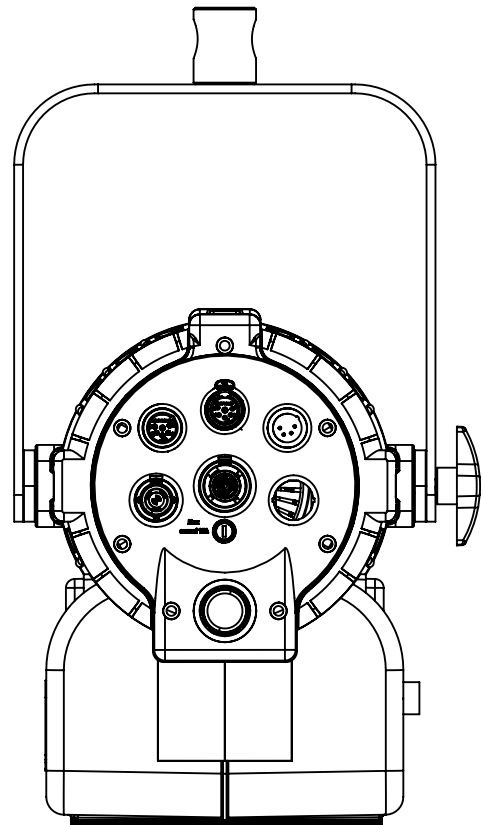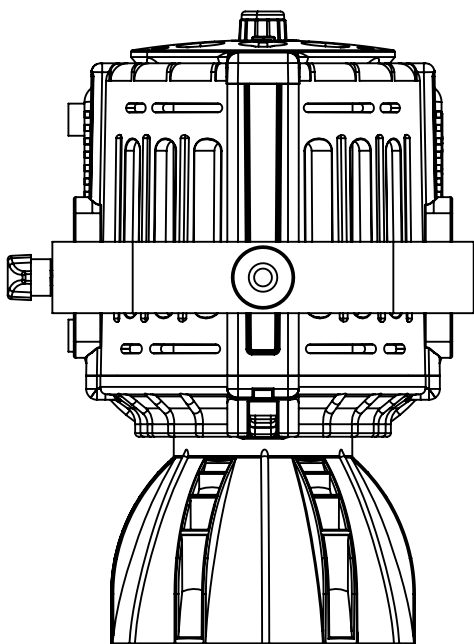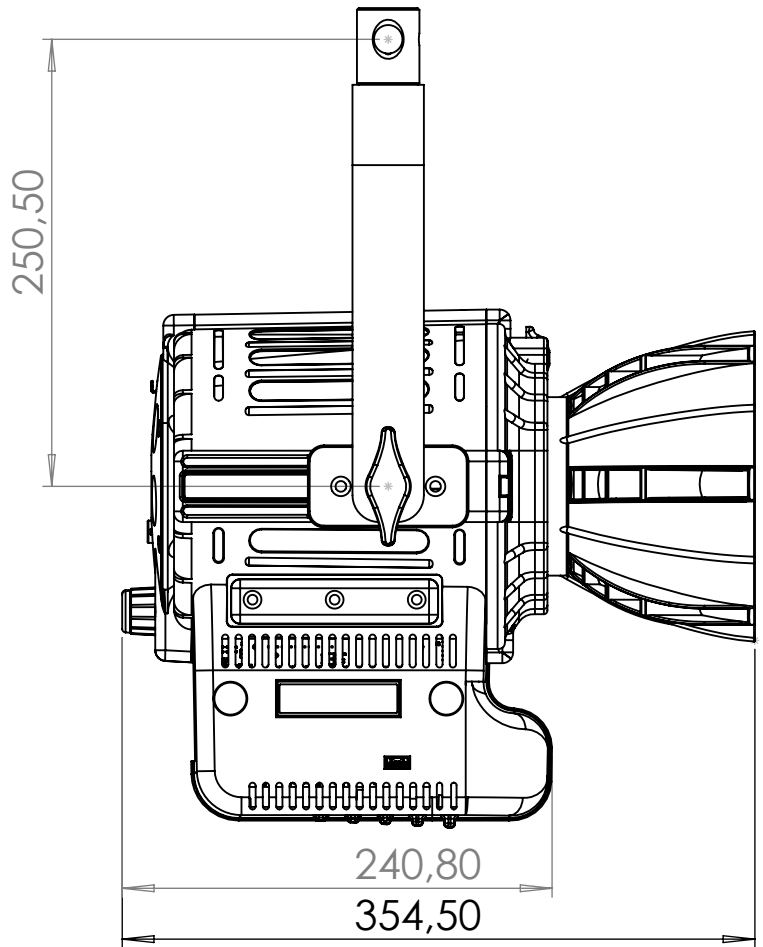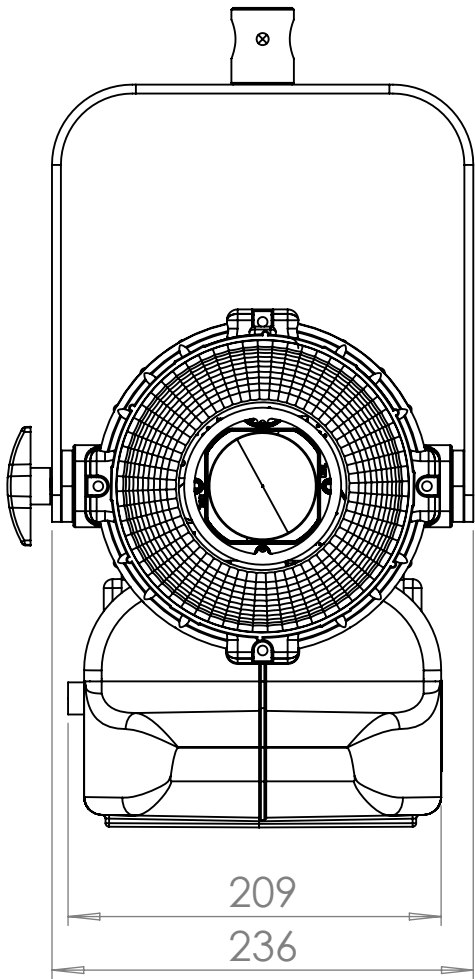

Pole Operated Yoke

