


CAT6A SF/UTP ETHERNET + DIGITAL AUDIO + POWER HYBRID CABLES

CVS LK*CAT6SF 12/3 AD*

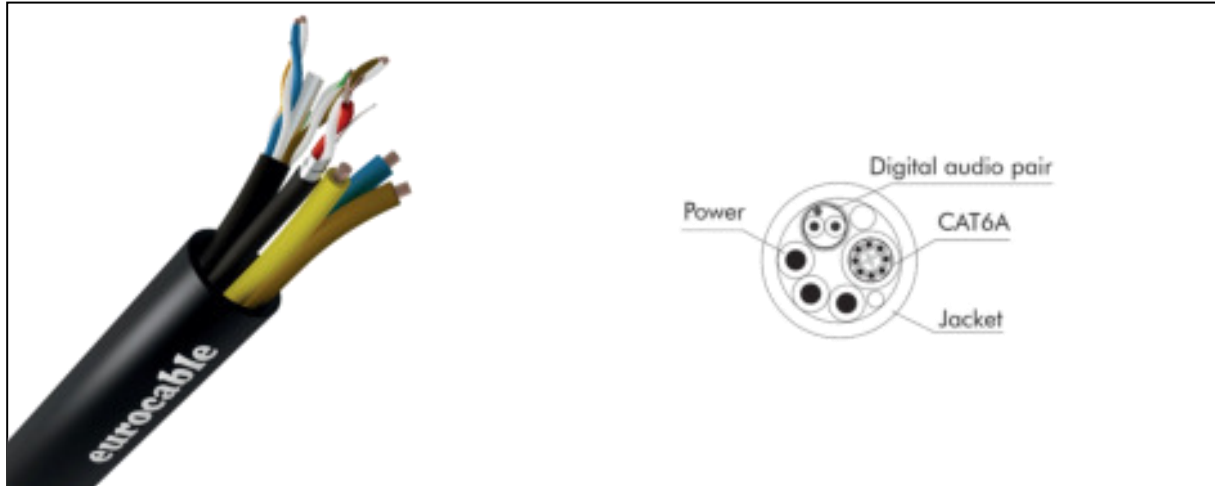

		CVS LK2CAT6SF 12/3 AD2	CVS LK1CAT6SF 12/3 AD1	
GENERAL DATA				
Cable	O.D.	21.30 mm	16.20 mm	
	Weight Kg/100m	46.90	36.70 mm	
	Operating temperature	-20°C/+70°C	-20°C/+80°C	
	Volt. Rate (Power)	600 V	300 V	
Jacket	Nominal Thickness	1.70 mm	1.60 mm	
	Color	Black		
	Material	PVC		
		Audio	CAT6A	Power
Cable	O.D.	4.00 mm	8.00 mm	10.60 mm
Jacket	Material	PVC		
	Nominal Thickness	0.65 mm	0.53 mm	
Shield	Material	Aluminium - Polyester tape plus 18 x 0.10 mm drain wire	Aluminium - Polyester tape plus drain wire	-
	Coverage	100%	100%	-
Conductor	Qty	2 (CVS LK2CAT6SF 12/3 AD2) 1 (CVS LK1CAT6SF 12/3)	2 (CVS LK2CAT6SF 12/3 AD2) 1 (CVS LK1CAT6SF 12/3 AD1)	3
	Strand	18 x 0.10 mm	1 x 0.58 mm	70 x 0.25 mm
	Area/AWG	0.14 mm ² /26	0.22 mm ² /24	3.44 mm ² /12
	Insulation O.D.	1.20 mm	1.00 mm	1.00 mm
	Material	Annealed tinned copper polyolefine insulated	Solid bare copper polyolefine insulated	Annealed bare copper PVC insulated