


## COLORFLOW RGBW 150cm (it. 230087)

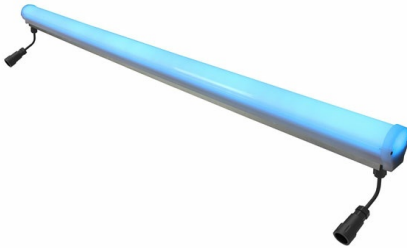

Ultra small form factor LED LINEAR TUBE with IP 67 rating protection. Suitable for architectural lighting, visual effects and light games. Standard 100cm. Aluminum dissipating structure and PMMA tube. To drive COLORFLOW RGBW use an external 48VDC Power Supply. On request: adjustable bracket -/+78°.

### Technical Specification

LED type	RGBW
Number of LEDs	66
Red lumen (lm)	570
Green lumen (lm)	660
Blu lumen (lm)	240
White lumen (lm)	840
Lenses	180°
Control type	Protocol USITT DMX512 - RDM
Setup	RDM/DRS
DMX channels	9ch - 5ch - 4ch
Input range	48VDC
Power (W)	45
Current	1A@48VDC
IP protection rating	67
Sizes l x p x h (mm)	1510 x 46
Weight (Kgs)	2,1
Mounting systems	Surface
Colour finishing	None
Marine Grade treatment	None
Product Category	Linear Bar

## Your Configuration

LED type	RGBW
Number of LEDs	66
Red lumen (lm)	570
Green lumen (lm)	660
Blu lumen (lm)	240
White lumen (lm)	840
Lenses	180°
Control type	Protocol USITT DMX512 - RDM
Input range	48VDC
Power (W)	45
Current	1A@48VDC
IP protection rating	67
Sizes l x p x h (mm)	1510 x 46
Weight (Kgs)	2,1
Mounting systems	Surface
Colour finishing	None
Marine Grade treatment	None
Product Category	Linear Bar