


COMPACTBAR RGBW 100cm (art. 235015)

RGBWA compact LED linear bar with 38 mm lenses . IP 67 protection rating.
DMX - RDM. Standard 100 cm. Available lengths 50 cm (9 lenses), 100 cm (18 lenses) and 150 cm (27 lenses) .

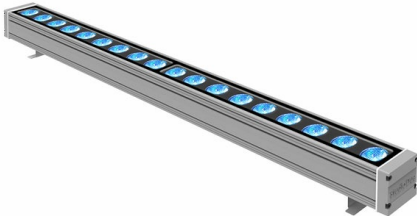

Technical Specification

LED type	RGBW (8W)
Number of LEDs	18
Lumen MAX	7000
Red lumen (lm)	1520
Green lumen (lm)	2700
Blu lumen (lm)	500
White lumen (lm)	2700
Lenses	8° 10°x30° 10°x50° 15° 25° 40° 60°
Filters	None f 100°
Connectors and cables	Main Power: 3pin IP67 (male-female) DMX signal: 3pin IP67 connector (male-female)
Control type	Protocol USITT DMX512 - RDM Protocol USITT DMX512 - RDM + Wireless (on request)
Functions	RDM/DRS Wireless DMX receiver
DMX channels	9ch - 6ch - 5ch - 4ch
Input range	200 - 240 VAC; 47/63 Hz
Power (W)	80
Power Factor	PF>0,95@230VAC
Tilt	160°

IP protection rating	67
Sizes l x p x h (mm)	1035 x 71 x 115
Weight (Kgs)	4,5
Mounting systems	Surface Truss (optional)
Colour finishing	Metal grey 7011 (standard) White RAL 9010 (standard) Black RAL 9005 (optional) Graphite gray (optional) Any RAL (optional)
Marine Grade treatment	None Yes
Product Category	Linear Bar

Your Configuration

LED type	RGBW (8W)
Number of LEDs	18
Lumen MAX	7000
Red lumen (lm)	1520
Green lumen (lm)	2700
Blu lumen (lm)	500
White lumen (lm)	2700
Lenses	8°
Filters	None
Control type	Protocol USITT DMX512 - RDM
Input range	200 - 240 VAC; 47/63 Hz
Power (W)	80
Power Factor	PF>0,95@230VAC
Tilt	160°
IP protection rating	67
Sizes l x p x h (mm)	1035 x 71 x 115
Weight (Kgs)	4,5
Mounting systems	Surface
Colour finishing	Metal grey 7011 (standard)
Marine Grade treatment	None
Product Category	Linear Bar