


## COMPACTBAR RGBW 150cm (art. 235017)

RGBWA compact LED linear bar with 38mm lenses. IP 67 protection rating. DMX-RDM. Standard 100 cm. Available lengths on request 50 cm (9 lenses), 100 cm (18 lenses) and 150 cm (27 lenses). On request 150 cm.

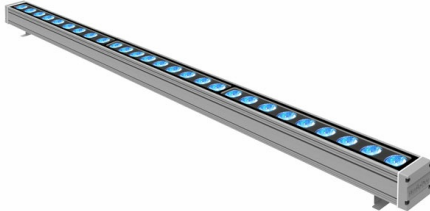

### Technical Specification

LED type	RGBW (8W)
Number of LEDs	27
Lumen MAX	10500
Red lumen (lm)	2280
Green lumen (lm)	4050
Blu lumen (lm)	750
White lumen (lm)	4050
Lenses	8° 10°x30° 10°x50° 15° 25° 40° 60°
Filters	None f 100°
Connectors and cables	Main Power: 3pin IP67 (male-female) DMX signal: 3pin IP67 connector (male-female)
Control type	Protocol USITT DMX512 - RDM Protocol USITT DMX512 - RDM + Wireless (on request)
Functions	RDM/DRS Wireless DMX receiver
Setup	RDM/DRS
DMX channels	9ch - 6ch - 5ch - 4ch
Input range	200 - 240 VAC; 47/63 Hz
Power (W)	120
Power Factor	PF>0,95@230VAC

Tilt	160°
IP protection rating	67
Sizes l x p x h (mm)	1530 x 71 x 115
Weight (Kgs)	5,7
Mounting systems	Surface Truss (optional)
Colour finishing	Metal grey 7011 (standard) Black RAL 9005 (optional) Graphite gray (optional) White RAL 9010 (optional) Any RAL (optional)
Marine Grade treatment	None Yes
Product Category	Linear Bar

## Your Configuration

LED type	RGBW (8W)
Number of LEDs	27
Lumen MAX	10500
Red lumen (lm)	2280
Green lumen (lm)	4050
Blu lumen (lm)	750
White lumen (lm)	4050
Lenses	8°
Filters	None
Control type	Protocol USITT DMX512 - RDM
Input range	200 - 240 VAC; 47/63 Hz
Power (W)	120
Power Factor	PF>0,95@230VAC
Tilt	160°
IP protection rating	67
Sizes l x p x h (mm)	1530 x 71 x 115
Weight (Kgs)	5,7
Mounting systems	Surface
Colour finishing	Metal grey 7011 (standard)
Marine Grade treatment	None
Product Category	Linear Bar