


**Lupo**  
Made in Italy

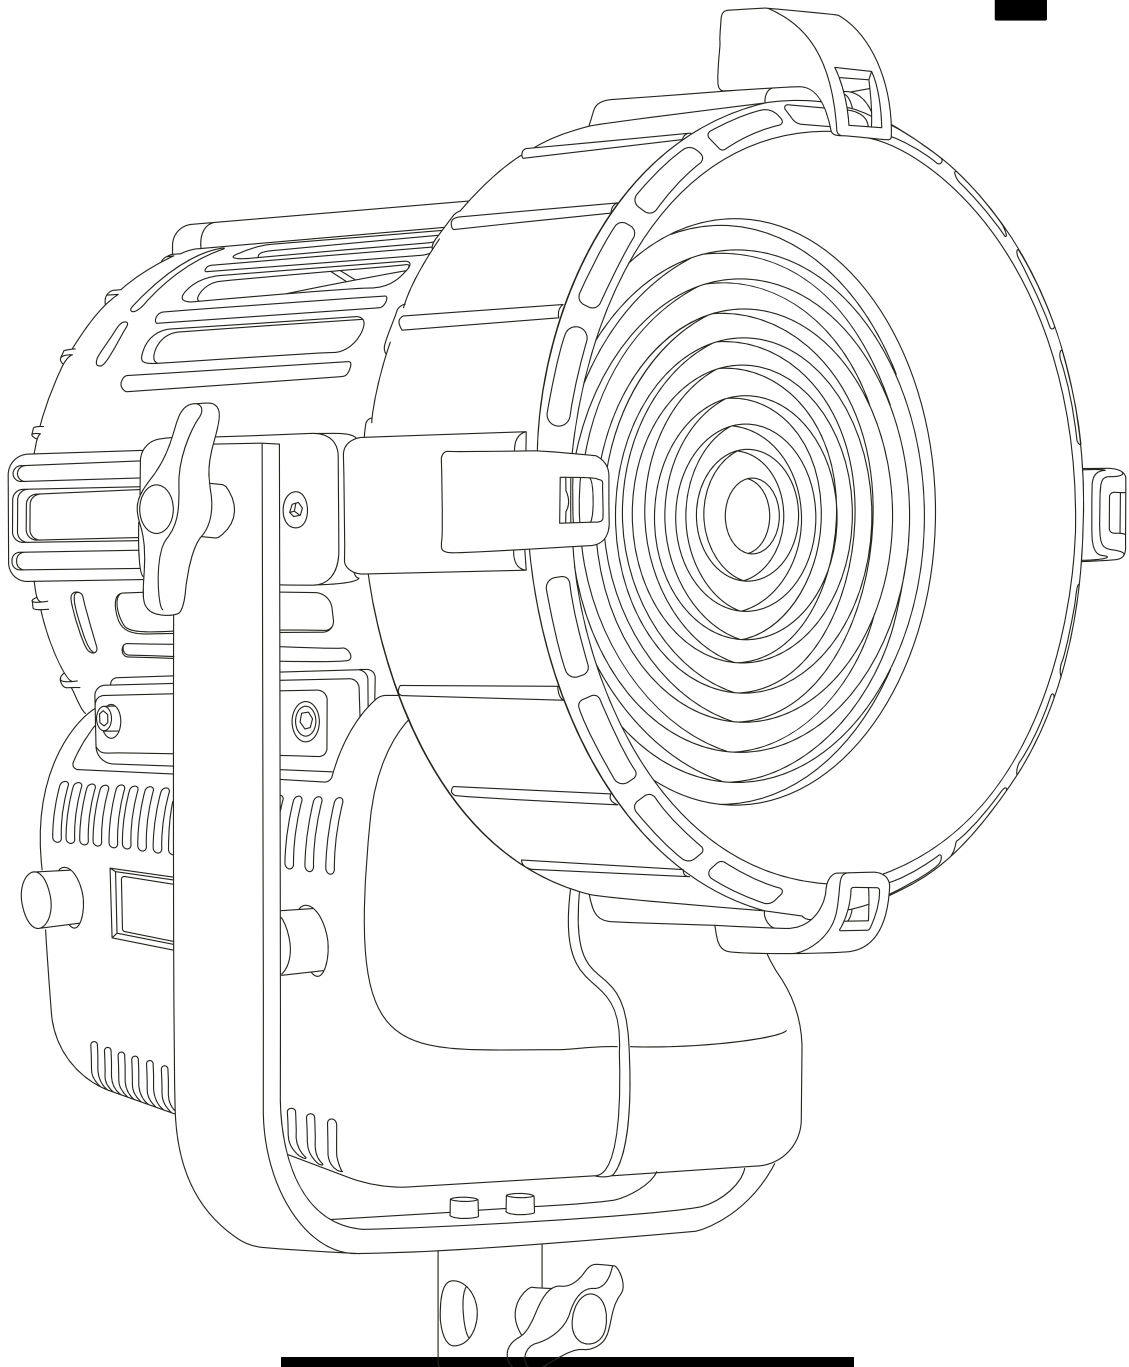

Cod 302 T PRO

**DayledPRO 2000**  
**3200 K**





## Technical Data

Dimensions (cm)	270 x 326 x 314 mm
Dimensions (in)	10.6 x 12.7 x 12.2 in
Weight (kg)	6 kg
Weight (lb)	13.2 lb
CRI (Colour Rendering Index)	> 97
TLCI (Television Lighting Consistency Index)	98
Estimated LED lifetime (L80)	50,000 hours
LED COB	220 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	220 W
Watt output (equivalent to tungsten)	2000 W
Fresnel lens	200 mm
Firmware upgrades	through USB port
Colour temperature	3200 K - tungsten balanced
Voltage AC	90 V - 240 V
Light beam	10° - 60°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96


## Photometric data

Distance	3200 K	
	spot	flood
Lux at 1 m - 3.2 ft	105000	25000
Lux at 2 m - 6.5 ft	22000	6500
Lux at 3 m - 9.8 ft	9200	3050
Lux at 4 m - 13.1 ft	4900	1750
Lux at 5 m - 16.4 ft	3100	1200

# Technical Drawing

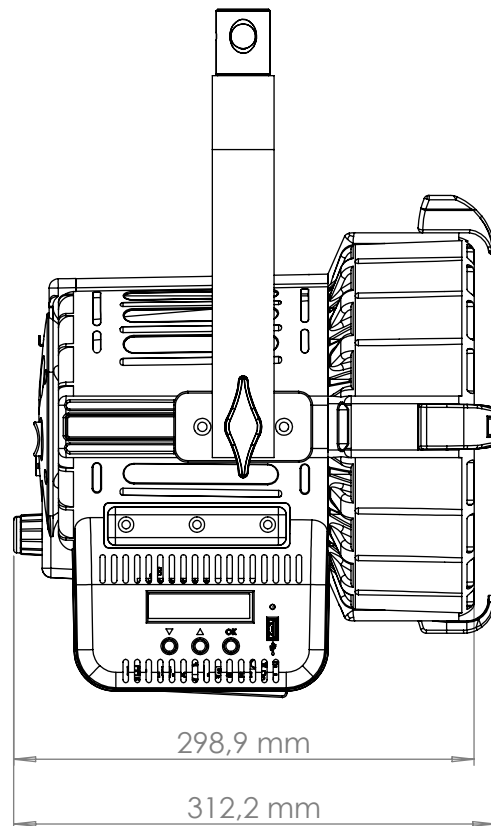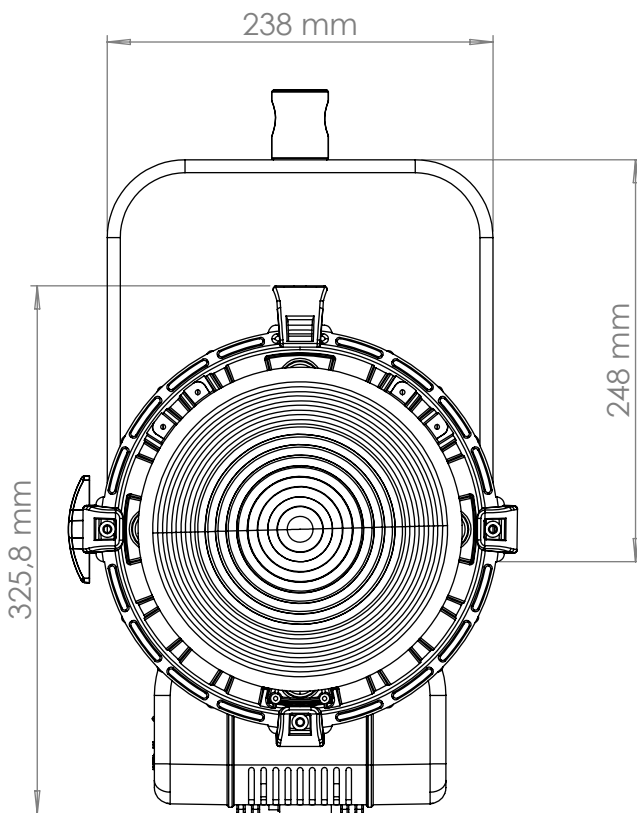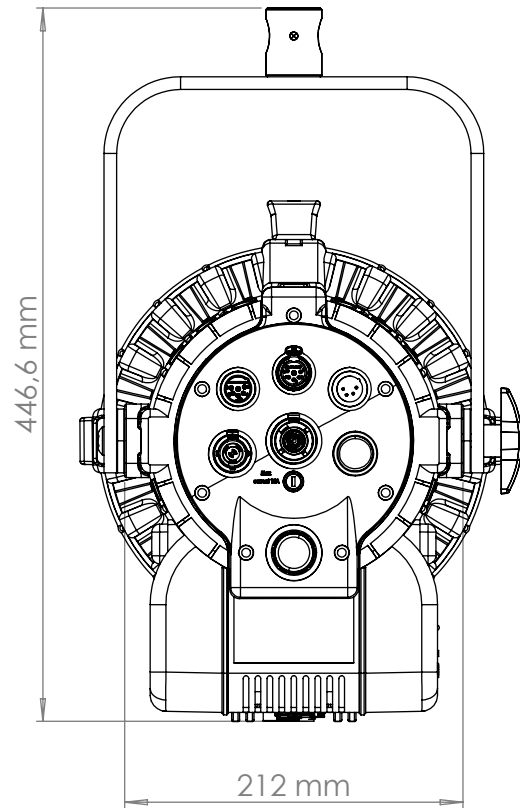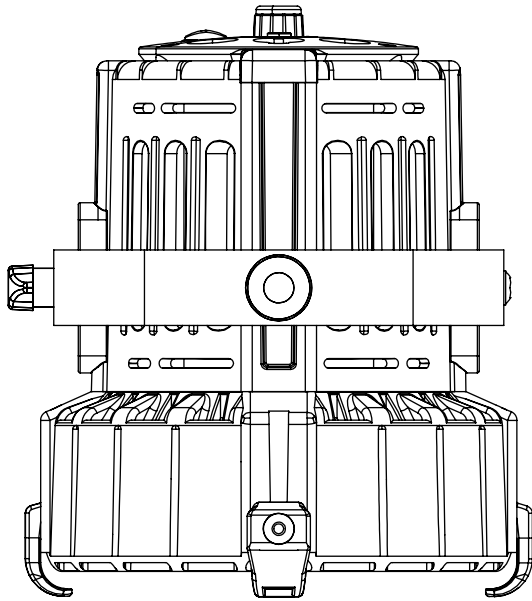

**Lupo**  
Made in Italy

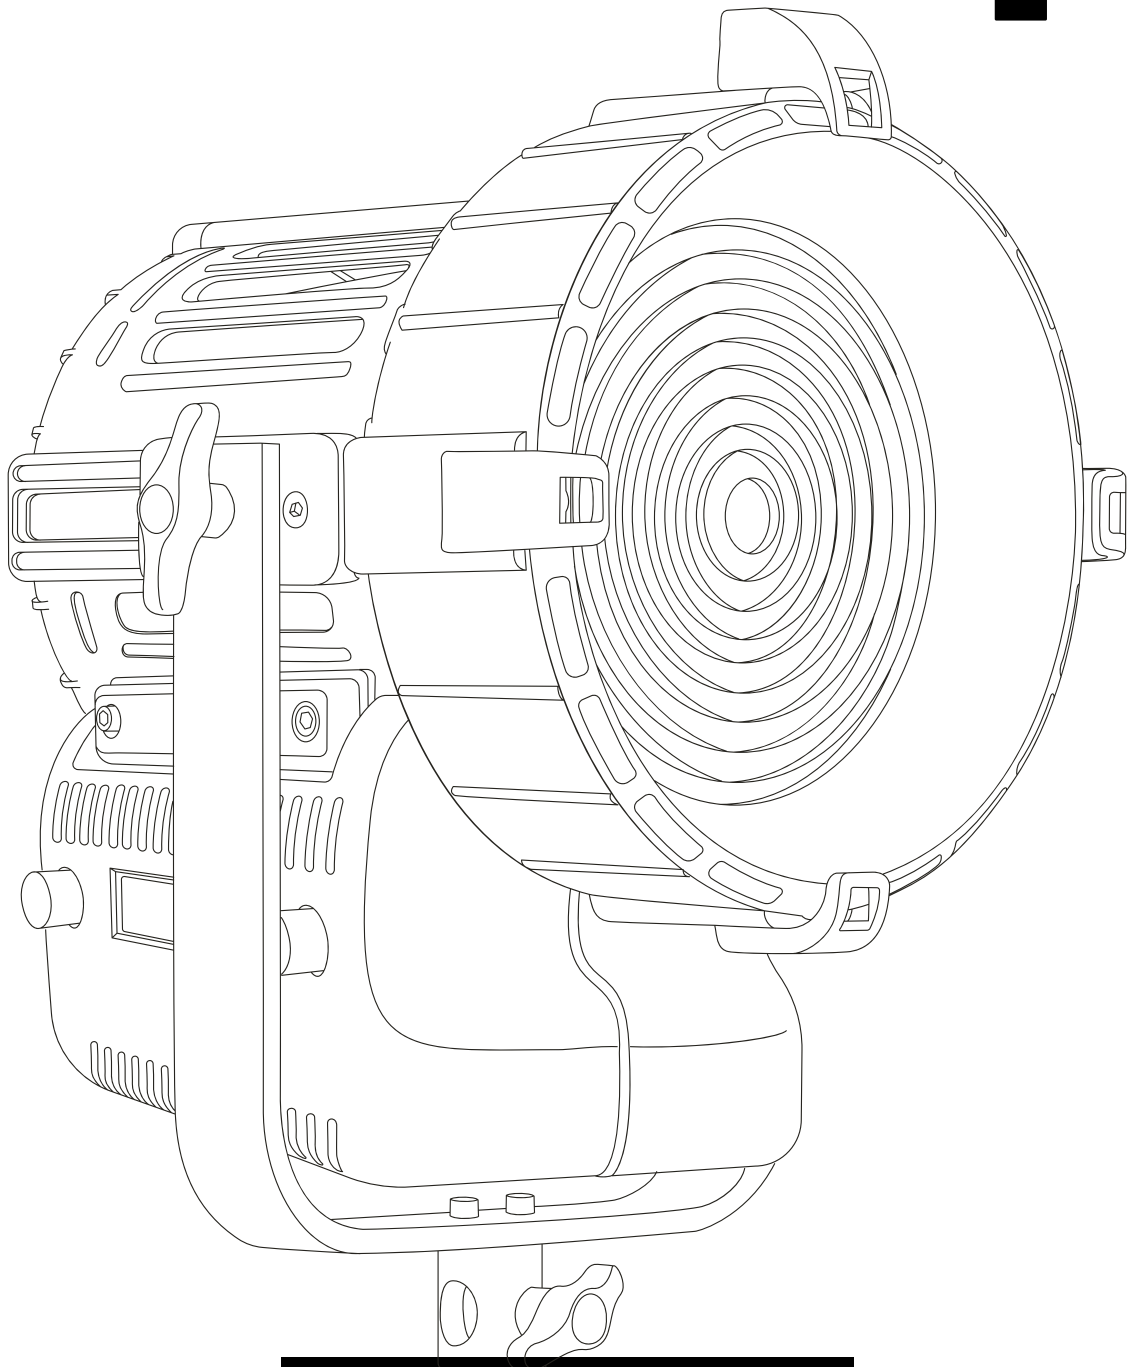

Cod 302 D PRO

**DayledPRO 2000**  
**5600 K**

## Technical Data

Dimensions (cm)	270 x 325 x 312 mm
Dimensions (in)	10.6 x 12.7 x 12.2 in
Weight (kg)	6 kg
Weight (lb)	13.2 lb
CRI (Colour Rendering Index)	> 97
TLCI (Television Lighting Consistency Index)	98
Estimated LED lifetime (L80)	50,000 hours
LED COB	220 W
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	220 W
Watt output (equivalent to tungsten)	2000 W
Fresnel lens	200 mm
Firmware upgrades	through USB port
Colour temperature	5600 K - daylight balanced
Voltage AC	90 V - 240 V
Light beam	10° - 60°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power Factor	0.96

## Photometric data

Distance	5600 K	
	spot	flood
Lux at 1 m - 3.2 ft	105000	26000
Lux at 2 m - 6.5 ft	22000	6850
Lux at 3 m - 9.8 ft	10100	3250
Lux at 4 m - 13.1 ft	5300	1940
Lux at 5 m - 16.4 ft	3400	1320

# Technical Drawing

