

# DAUS - 862

DAUS - VARIABLE WHITE LED 150 W



- **Type:** Footlight
- **Source:** Variable White LED 150 W
- **Optics:** Asymmetric

Footlight

## Lighting reinvented

Offering a true tunable white from 2200K to 6500K, Dalis 862 footlight incorporates 48 patented asymmetric reflectors arranged in a double row. Each row can be controlled independently offering long or short throw capacities and creating upstage or downstage lighting.

Set at the edge of the stage and not visible to the audience, Dalis 862 provides quality white light on performers from the front to the back of the stage. Each unit also integrates red and blue coloured position lights independently controlled, acting as a signal for the performers and also marking the edge of the stage.

### Features

- **True tunable white:** from very warm (2200K) to daylight (6500K) to match every skin tones and moods on stage
- **4 red and blue coloured position lights:** individual control of each light acting as a signal and marking safely the edge of the stage without disturbing the audience
- **Adjustable response time:** choice of fast or slow dimming for tungsten-like simulation - adjustment by DMX protocol
- **Strobe:** independent control of speed and duration
- **Ethernet-DMX node:** data IN through RJ45 connector; data OUT through DMX for daisy chaining
- **Universal data control:** compatible with DMX, RDM, Art-Net, sACN protocols
- **Remote setup:** all parameters can be adjusted by RDM protocol
- **16-bit control:** independent and precision dimming on both warm and cool whites
- **Control of up to 4 groups:** precision lighting by separating the unit into 2 or 4 sections to target defined areas on stage
- **Dimming parameters:** choice of square or linear dimming curves
- **Adjustable feet:** can be installed directly on the floor; simple retractable foot mechanism to aid floor focusing

### Optical

- **Exclusive patented optical system:** 48 micro optical asymmetric reflectors spreading the light evenly with very wide aperture (90°)
- **Double row arrangement optical system:** bottom row for downstage and top row for upstage lighting with independent control of light intensity
- **High efficiency:** massive light output, small power consumption
- **Long life:** outstanding operational lifetime expectation, no need to replace lamps, low maintenance
- **High transmissive coated protective glass window:** ensures optimal light transmission
- **Electronic dimmer:** dimming without clipping or cut-out at low intensity levels; high quality smoothing

### Construction

- **Made in Europe:** control over all aspects of quality
- **PSU:** built-in electronic flicker-free power supply for easy, plug-and-play installation
- **Power connectors:** neutriK® powerCON TRUE1 TOP IN and OUT connectors for daisy chaining; delayed power out switching against inrush current
- **Perfect integration on stage:** compact size - all controls and connections are under the unit to maintain clean sight lines
- **Fanless system:** convection cooling- perfect for sound sensitive applications - less maintenance required
- **Electronic thermal management system:** ensures maximum performance of the system without any risk of overheating

Picture:862

DSEN284\_862 - 23/03/2022

Robert Juliat reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice.

Robert Juliat S.A.S., 32 rue de Beaumont, 60530 Fresnoy-en-Thelle - France  
Telephone : +33 (0)3 44 26 51 89 - fax : +33 (0)3 44 26 90 79 - info@robertjuliat.fr  
www.robertjuliat.com



ROBERT JULIAT

## Source

- **Lamp type:** LED - 2 colours
- **Power:** 130 W
- **Lumen output:** 10464 lm
- **Life:** 40000 hours (LM70)

Colours	Power *	Lumen output*	Colour temperature*	CRI* (min)
Warm white	65 W	3 984 lm	2200K	80
Cool white	65 W	6 480 lm	6500K	70


(\*) manufacturer's data

## Optics

### Characteristics

- **Type:** Asymmetric
- **Horizontal spread:** °
- **Vertical spread:** 90°

## Installation and photometrics

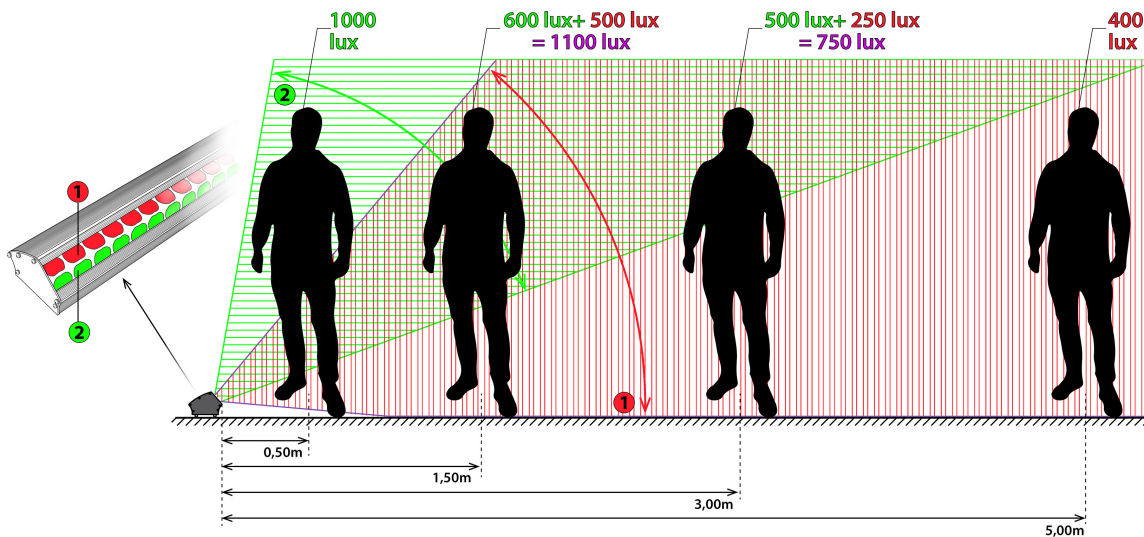

**1: Top row for Upstage lighting - 2: Bottom row for Downstage lighting**

## Remote control

- **Data protocol:** USITT DMX512-A  
RDM / Art-Net / sACN

- **Data IN connector:** 5 pins XLR mâle + etherCON RJ45
- **Data OUT connector:** 5 pins XLR femelle



### • DMX chart:

#### Mode 1 (41 channels)

Dimmer @16b  
Up: 4groups CW+WW @16b  
Dwn: 4groups CW+WW @16b  
Strobe: duration+speed  
Response time  
Control mode  
Position light: blue+red+dim

#### Mode 2 (19 channels)

Up: Dim+CW+WW @16b  
Dwn: Dim+CW+WW @16b  
Strobe: duration+speed  
Response time  
Control mode  
Position light: blue+red+dim

#### Mode 3 (13 channels)

Up: Dim+CW+WW @8b  
Dwn: Dim+CW+WW @8b  
Strobe: duration+speed  
Response time  
Control mode  
Position light: blue+red+dim

#### Mode 4 (11 channels)

Dimmer @16b  
Balance  
CCT  
Strobe: duration+speed  
Response time  
Control mode  
Position light: blue+red+dim


#### Mode 5 (10 channels)

Dimmer @8b  
Balance  
CCT  
Strobe: duration+speed  
Response time  
Control mode  
Position light: blue+red+dim

#### Mode 6 (56 channels)

Up1: Dim+CW+WW @16b  
Up2: Dim+CW+WW @16b  
Up3: Dim+CW+WW @16b  
Up4: Dim+CW+WW @16b  
Dwn1: Dim+CW+WW @16b  
Dwn2: Dim+CW+WW @16b  
Dwn3: Dim+CW+WW @16b  
Dwn4: Dim+CW+WW @16b

## Dimensions and weight

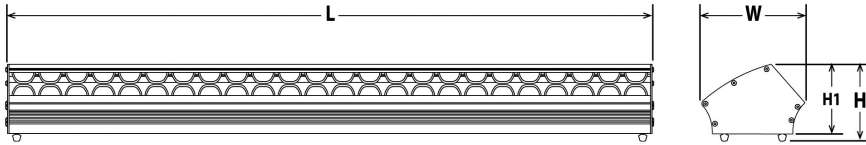

**Weight:** 8 kg (17.6 lbs)

Height	Length	Width	Yoke	Tilt
H= 117 mm (4.6 in) H1= 105 mm (4.1 in) H2= 137 mm (5.4 in)	L= 1005 mm (39.6 in)	W= 155 mm (6.1 in)		TU= 10° TD= 10°

## Shipping

- **Weight :** 9.5 kg (20.9 lbs)
- **Volume :** .05 m<sup>3</sup> (1.83 ft<sup>3</sup>)

## Installation

- **Minimum distance to illuminated surface:** 0.2 m ( 0.7 ft )
- **Operating position:**



## Construction

- **Housing:** Extruded aluminium
- **Colour:** Black
- **Cooling:** Convection cooling
- **Maximum ambient temperature (Ta):** 40°C (104°F)
- **Maximum case temperature (Tc):** 70°C (158°F)
- **Total heat dissipation:** 444 BTU/h
- **Ingress Protection (IP) rating:** IP20

## Electrical compatibility

- 220/230 V - 50 Hz
- 245 V - 50 Hz
- 110/120 V - 60 Hz
- 208 V - 60 Hz
- 220/230 V - 60 Hz
- 100 V - 50 Hz
- 100 V - 60 Hz
- Selector: automatic detection

## Power input



- **Type:** Neutrik powerCON TRUE1 TOP (connector included)

## Power consumption

Voltage	Frequency	Current	Power	Power factor
230 V	50 Hz	0.7 A	130 W	0.9
120 V	60 Hz	1.1 A	130 W	0.97
100 V	60 Hz	1.4 A	130 W	0.98

## Power Supply Unit

- **PSU:** Internal - Electronic PSU - Flicker free with PFC
- **Control:** Local / DMX
- **Protection:** -
- **Power thru:** Neutrik powerCON TRUE1 TOP - Maximum of 20 units (230 V) / 10 units (120 V)

## Approvals




## Warranty

- **Fixture: 3 years**  
See General Sales Condition on website




## Model

<b>862</b>	Variable White LED 150 W Footlight - 862 Dalis
------------	--

## Options

<b>FC860</b>	Flight-case for 6 Dalis / accessories - Dim: 1230x590x560mm - Weight: 36 Kg	
--------------	---	---

## Accessories

<b>CAL03</b>	3 meter power cable ( 3G1,5 HO7RNF) with Neutrik PowerCon® True1 and CEE 7/7 (2P+T NF/SCHUKO) connectors - Poids: 0.55 Kg	
<b>CAL05</b>	Combined Neutrik PowerCon® True1 / DMX (5 pins) patch cable - length: 1m	
<b>DMXcat</b>	Bluetooth DMX/RDM Multifunction test tool - City Theatrical DMXcat®	
<b>FC860/S</b>	Flight-case for 6 Dalis / accessories - Poids: 36 Kg	