





Archi 40

RGBW/FC

ARCHI 40 is the smaller version of the new Archibar SL line. It's equipped with 8 RGBW/FC High Power LEDs.

• Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR).

TECHNICAL SPECIFICATION

SOURCE

n. 8 RGBW-FC-LEDs Total out lumen:

R 700lm, G 900lm, B 210lm, W 1400lm

Total light power: 56W

OPTIC

Medium beam (38 mm lenses)

On request: narrow, wide (38 mm lenses)

TILT

Manual 160°

• CONTROL

Standard interface: RS-485 Protocol: USITT DMX 512

CONNECTIONS

Signal: 4pin IP 67 connector (male-female) possibility to link up to 32 devices in chain Available as accessories:

- Wireless DMX receiver

Main Power: 3pin IP 67 connector (male-female) possibility to link up to 8 devices in chain.

SAFETY

n. 2 eyebolts for safety chains

SETUP AND CONFIGURATION

By DRS (remote control device) Dedicated DMX channel for white balance DMX or Auto mode with Master-Slave function Intelligent temperature control

Halogen simulation CYM simulation Flicker-free function

Smooth dimming function

• IP 67 RATING PROTECTION

POWER SUPPLY

Voltage range: 100-240VAC Frequency range: 47-63Hz Active Power factor: PF>0.90/230VAC

Current: 0.30A@230VAC

Power: 60W Fuse T3,15A (inside fixture)

DMX CHANNELS

9CH mode, 6CH mode, 5CH mode, 4CH mode


PHYSICAL

WxDxH: 325x60x91,4 mm (dimension of profile)

Weight: 2,6 Kg.

Studio Due

PHYSICAL

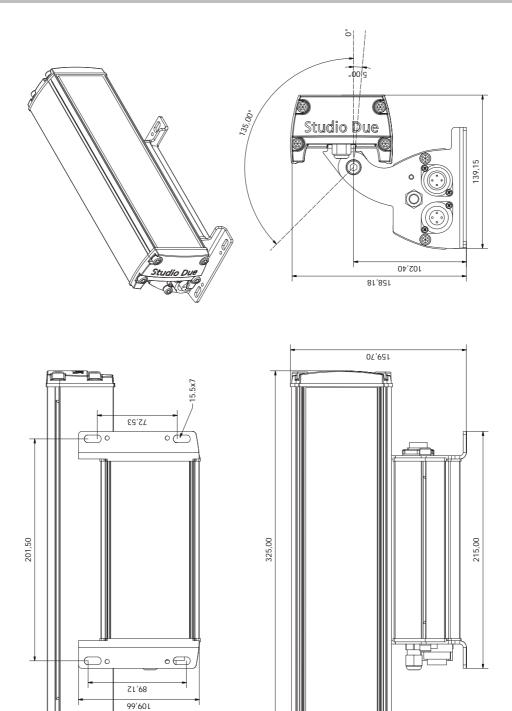

© Copyright 2014 **Studio Due light** srl Strada Poggino, 100 01100 Viterbo (Italy) tel. +39.0761.352520 (4 lines) fax +39.0761.352653 C.F. e P. IVA 05793121004