

MINI PONY F DMX

LED THEATRE

TRADITIONAL THEATRE

STAGE


DIMMER

CONSOLE



Spot maneggevole dalle dimensioni compatte, con sorgente a LED da 50 W con lente Fresnel o PC, regolazione manuale dello zoom, comandato da segnale DMX (DALI a richiesta), completo di telaio porta gelatina. Segnali di controllo DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Funzioni stand-alone con controllo locale dell'intensità. Frequenza PWM regolabile da 300Hz a 4Khz. Risoluzioni del dimmer a 8 bit, conversione software 8-11 bit, 16 bit. Presa USB per aggiornamento software.

Handy spotlight with small dimensions, with 50W LED source, dmx dimming control, stand alone functions, fresnel lens, manual regulation of zoom, complete with color frame. Control signals: DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Stand-alone functions with local control of intensity. PWM can be set via display from 300Hz to 4Khz in not even steps. Resolution 8/ 8-11Bit conversion /16 Bit. USB port for software update.

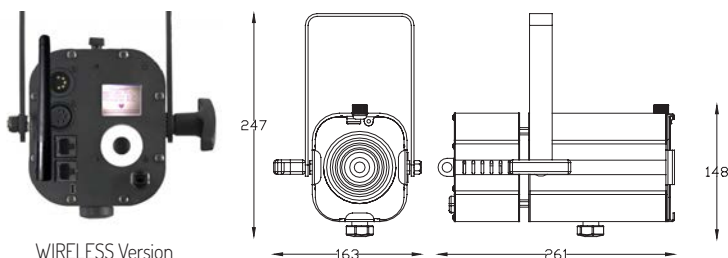

DATI TECNICI - TECHNICAL DATA



100/240V AC



50 W



COB
BRIDGELUX

CRI

90



EXTRUDED ALUMINIUM
+ STEEL SHEETS



1,7 Kg

IP

20



EPOXIDIC POWDER

VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	WIRELESS	Dimensioni porta accessori Accessori frame dimensions	Dimensione lente frontale Frontal lens dimension	Optics	€
9801036605	3000K		98x114 mm	80 mm	Fresnel 13° - 88°	
9801037090	3000K	✓	98x114 mm	80 mm	Fresnel 13° - 88°	
9801033005	5600K		98x114 mm	80 mm	Fresnel 13° - 88°	
9801037005	5600K	✓	98x114 mm	80 mm	Fresnel 13° - 88°	

ACCESSORI - ACCESSORIES

Cod. 0100010005 4 LEAF BARNDOOR	Cod. 0400010005 COLOR FRAME
Cod. 9184000000 SINGLE TRUSSCLAMP	Cod. 1300004505 HOOK CLAMP
Cod. 1400500000 Ø3MM STEEL SAFETY BOND	

DATI FOTOMETRICI - PHOTOMETRIC DATA

FASCIO LARGO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	979	435	245	157	109	80	61	48
Diam. m	2,6	3,9	5,2	6,5	7,7	9,0	10,3	11,6

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	3,4	5,2	6,9	8,6	10,3	12,1	13,8	15,5
---------	-----	-----	-----	-----	------	------	------	------

FASCIO STRETTO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	6019	2675	1505	963	669	491	376	297
Diam. m	0,5	0,8	1,1	1,4	1,6	1,9	2,2	2,5

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	0,9	1,3	1,7	2,1	2,6	3,0	3,4	3,8
---------	-----	-----	-----	-----	-----	-----	-----	-----