

Cablecross 25HD



3-channel cable duct. It is the best solution for holding electrical wiring, telephonic and data cables, hydraulic lines, in offices, yards, trade centres, markets, camping places, live events, exhibition centres, military and public areas.


Technical specifications

Use	→	pavement
Reaction to Fire:	→	CLASS 1 in accordance with the uni 9174 + uni 8457
It complies with the EEC 73/23 directives regarding the low voltage electrical equipment		
It can be crossed by heavy vehicles according to its maximum roll-on load: 170N/cm ²		
Excellent resistance to solvents, acids, oils and atmospheric agents		
Max. operating voltage:	→	1000v c.a. - 1500 v c.c.
Insulation resistance:	→	29.5 GΩ
Protection:	→	IP30xc (according to CEI EN 60529-9/92 regulations)
Surface hardness:	→	90-98 (shore A)
Body:	→	semi-rigid expanded polyurethane & auto-peeling moulded extremely resistant against cuts or incisions
Top lid material:	→	polycarbonate / PC (very flexible and resistant)
The lid is fixed to the base by means of a moulded tug hinge (velcro [®])		

Cablecross code



Description

CC25HD	→	CC25HD Cablecross - 3 channel
CC25HDX4	→	4-way cross CCH25HD corner
CC25LHD	→	CC25HD Cablecross lid
CC25LHDX4	→	4-way cross CC25HD corner lid
CCSTM	CC	→ Strap for lid – M Size
CC25LOGO	→	CC25HD Logo Personalization

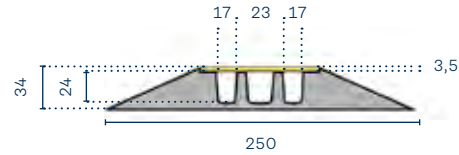


Cablecross 25HD Code CC25HD

Dimensions	→	250 x 34 x 1000 mm
Number of Cablecross per package	→	5
Weight	→	2.85 kg
Lid weight	→	0.40 kg

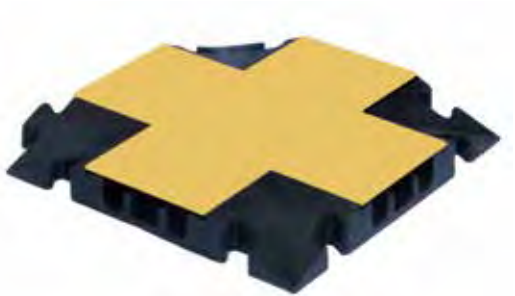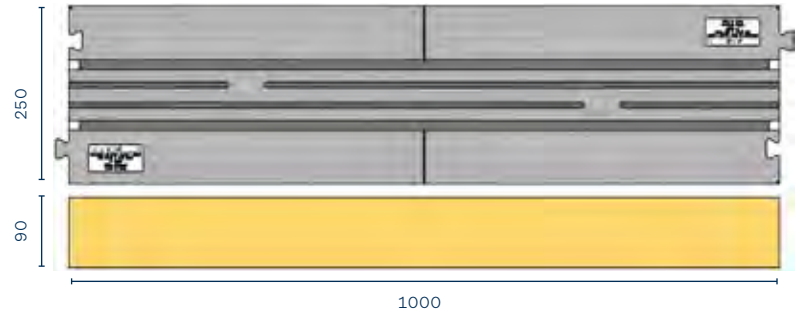



4-Way Cross Corner Code CC25HDX4

Dimensions	→	250 x 34 x 250 mm
Number of Cablecross per package	→	1
Weight	→	0.80 kg
Lid weight	→	0.20 kg

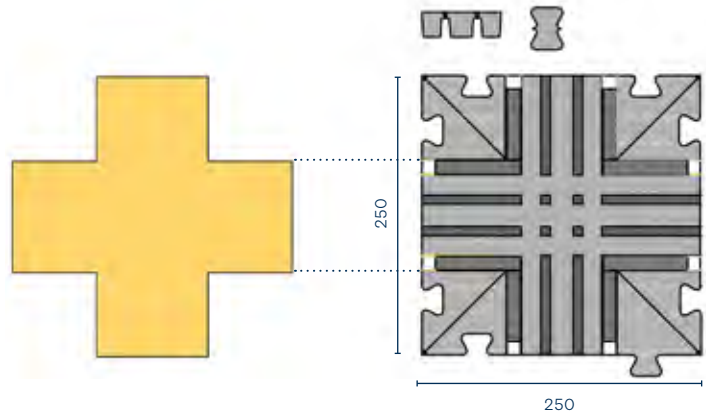

Cablecross 25HD

1. Rounded angles - no steps.
2. Moulded Velcro (not glued).
3. Ergonomic built-in handle with rounded edges.
4. Prearrangement for ground fastening.

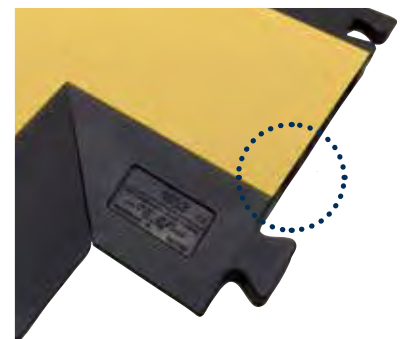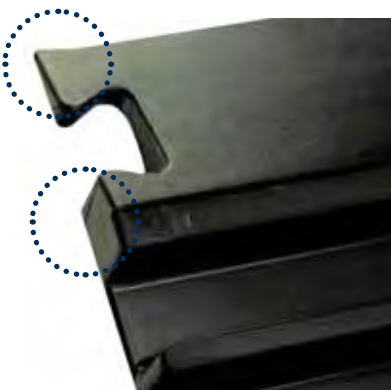

Cablecross 66HD






3-channel cable duct. It is the best solution for holding electrical wiring, telephonic and data cables, hydraulic lines, in offices, yards, trade centres, markets, camping places, live events, exhibition centres, military and public areas.

Use	→ pavement
Reaction to Fire:	→ CLASS 1 in accordance with the uni 9174 + uni 8457
It complies with the EEC 73/23 directives regarding the low voltage electrical equipment	
It can be crossed by heavy vehicles according to its maximum roll-on load: 170N/cm ²	
Excellent resistance to solvents, acids, oils and atmospheric agents	
Max. operating voltage:	→ 1000v c.a. - 1500 v c.c.
Insulation resistance:	→ 29.5 GΩ
Protection:	→ IP30xc (according to CEI EN 60529-9/92 regulations)
Surface hardness:	→ 90-98 (shore A)
Body:	→ semi-rigid expanded polyurethane & auto-peeling moulded extremely resistant against cuts or incisions
Top lid material:	→ polycarbonate / PC (very flexible and resistant)
The lid is fixed to the base by means of a moulded tug hinge (velcro [®])	

Cablecross code


Description

CC66HD	→ CC66HD Cablecross - 3 channel
CC66HDC30	→ 30° 2-way cross CCH66HD corner
CC66HDT3	→ 3-way "T" CC66HD Corner
CC66LHDC	→ CC66HD Cablecross Lid
CC66LHDT3	→ CC Strap for lid - M Size
CC66LHDC30	→ CC25HD Logo Personalization
CC66LHDC	→ 4-way cross CC25HD corner lid
CC66LHDT3	→ CC Strap for lid - M Size
CC66LHDC30	→ CC25HD Logo Personalization

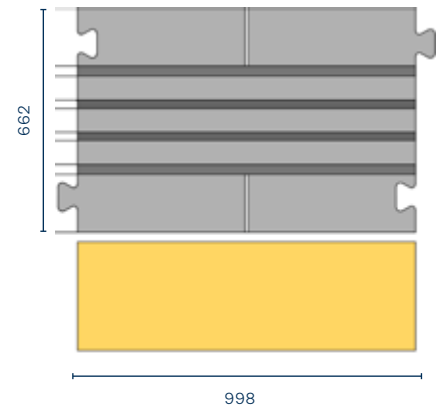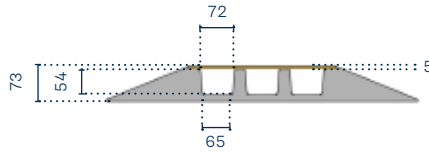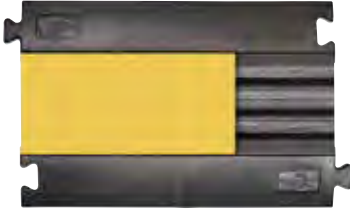

Cablecross 66HD Code CC66HD

Dimensions	→	662 x 73 x 1000 mm
Number of Cablecross per package	→	2
Weight	→	12.8 kg
Lid weight	→	1.5 kg

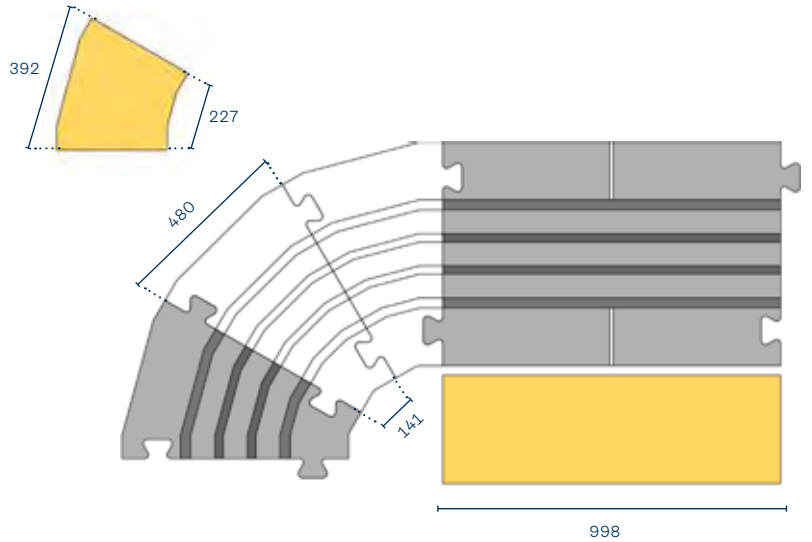

30° 2-WAY Corner Code CC66HDC30

Dimensions	→	370 x 73 x 375 mm
Number of Cablecross per package	→	1
Weight	→	3.7 kg
Lid weight	→	0.40 kg

Cablecross 66HD

1. Rounded angles - no steps.
2. Moulded Velcro (not glued).
3. 3-way "T" CORNER
4. Prearrangement for ground fastening.

