

# PONY 200 F DMX

LED THEATRE

TRADITIONAL THEATRE

STAGE


DIMMER

CONSOLE



Spot con sorgente a LED da 200 W con lente fresnel, regolazione manuale dello zoom, comandato da segnale DMX, completo di telaio porta gelatina. Segnali di controllo DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Funzioni stand-alone con controllo locale dell'intensità e timer incorporato. Frequenza PWM regolabile da 300Hz a 4Khz. Risoluzioni del dimmer a 8 bit, conversione software 8-11 bit, 16 bit. Presa USB per aggiornamento software.

Spotlight with 200 W LED source, dmx dimming control, stand alone functions, fresnel lens, manual regulation of zoom, complete with color frame. Control signals: DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Stand-alone functions with local control of intensity. PWM can be set via display from 300Hz to 4Khz in not even steps. Resolution 8/8-11Bit conversion /16 Bit. USB port for software update.

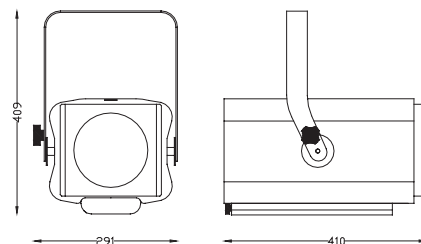

## DATI TECNICI - TECHNICAL DATA



100/240V AC



200 W



1 LED COB BRIDGELUX



90



EXTRUDED ALUMINIUM + STEEL SHEETS



8,6 Kg



20



EPOXIDIC POWDER

## VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	Dimensioni porta accessori Accessori frame dimensions	Dimensione lente frontale Frontal lens dimension	Ottica Optics	€
9819036605	3000K	185x185 mm	150 mm	Fresnel 11° - 96°	
9819036505	5600K	185x185 mm	150 mm	Fresnel 11° - 96°	

## ACCESSORI - ACCESSORIES

Cod. 0100000005 4 LEAF BARNDOOR	Cod. 0400000005 COLOR FRAME
Cod. 9184000000 SINGLE TRUSSCLAMP	Cod. 1300004505 HOOK CLAMP
Cod. 1400500000 Ø3MM STEEL SAFETY BOND	

## DATI FOTOMETRICI - PHOTOMETRIC DATA

### FASCIO LARGO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	10
Lux	3.285	1.460	821	526	365	268	205	131
Diam. m	1,8	2,7	3,7	4,6	5,5	6,4	7,3	9,1

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	3,3	4,9	6,5	8,2	9,8	11,5	13,1	16,4
---------	-----	-----	-----	-----	-----	------	------	------

### FASCIO STRETTO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	4	5	8	10	12	14	16
Lux	41.750	10.438	6.680	2.609	1.670	1.160	852	652
Diam. m	0,3	0,5	0,7	1,1	1,3	1,6	1,9	2,1

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	0,5	1,0	1,3	2,0	2,5	3,0	3,5	4,0
---------	-----	-----	-----	-----	-----	-----	-----	-----