


PONY 200 PC DMX



Spot maneggevole con sorgente a LED da 200 W con lente piano convessa, regolazione manuale dello zoom, comandato da segnale DMX, completo di telaio porta gelatina. Segnali di controllo DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Funzioni stand-alone con controllo locale dell'intensità. Frequenza PWM regolabile da 300Hz a 4Khz. Risoluzioni del dimmer a 8 bit, conversione software 8-11 bit, 16 bit. Presa USB per aggiornamento software.

Spotlight with 200W LED source, dmx dimming control, stand alone functions, plano-convex lens, manual regulation of zoom, complete with color frame. Control signals: DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Stand-alone functions with local control of intensity. PWM can be set via display from 300Hz to 4Khz in not even steps. Resolution 8/8-11Bit conversion /16 Bit. USB port for software update.

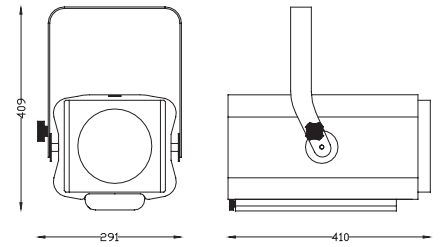

DATI TECNICI - TECHNICAL DATA



100/240V AC



200 W



1 LED COB BRIDGELUX

CRI

90



EXTRUDED ALUMINIUM + STEEL SHEETS



8,6 Kg

IP

20



EPOXIDIC POWDER

VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	Dimensioni porta accessori Accessori frame dimensions	Dimensione lente frontale Frontal lens dimension	Ottica Optics	€
9819016605	3000K	185x185 mm	150 mm	PC 8° - 96°	
9819016505	5600K	185x185 mm	150 mm	PC 8° - 96°	

ACCESSORI - ACCESSORIES

Cod. 0100000005 4 LEAF BARNDOOR	Cod. 0400000005 COLOR FRAME
Cod. 9184000000 SINGLE TRUSSCLAMP	Cod. 1300004505 HOOK CLAMP
Cod. 1400500000 Ø3MM STEEL SAFETY BOND	

DATI FOTOMETRICI - PHOTOMETRIC DATA

FASCIO LARGO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	10
Lux	2300	890	501	320	223	163	125	80
Diam. m	2,7	4,1	5,5	6,8	8,2	9,6	10,9	13,7

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	3,4	5,1	6,9	8,6	10,3	12,0	13,7	17,1
---------	-----	-----	-----	-----	------	------	------	------

FASCIO STRETTO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	4	6	8	10	12	14	16
Lux	42.219	11.055	4.913	2.764	1.769	1.228	902	691
Diam. m	0,2	0,4	0,6	0,8	0,9	1,1	1,3	1,5

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	0,3	0,7	1,0	1,3	1,6	2,0	2,3	2,6
---------	-----	-----	-----	-----	-----	-----	-----	-----

LED THEATRE

TRADITIONAL THEATRE

STAGE

DIMMER

CONSOLES