

PONY 200 PROFILE 8°/22° DMX




Sagomatore con sorgente a LED da 200 W con ottica 8°/22°, regolazione manuale dello zoom e del focus, comandato da segnale DMX, completo di telaio porta gelatina.

Segnali di controllo DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Funzioni stand-alone con controllo locale dell'intensità e timer incorporato. Frequenza PWM regolabile da 300Hz a 4Khz. Risoluzioni del dimmer a 8 bit, conversione software 8-11 bit, 16 bit. Presa USB per aggiornamento software.

Profile with 200W LED source, dmx dimming control, stand alone functions, 8°/22° optics, manual regulation of zoom and focus, complete with color frame.

Control signals: DMX512, DALI (OPTIONAL), WIRELESS DMX (OPTIONAL). Stand-alone functions with local control of intensity. PWM can be set via display from 300Hz to 4Khz in not even steps. Resolution 8/ 8-11Bit conversion /16 Bit. USB port for software update.

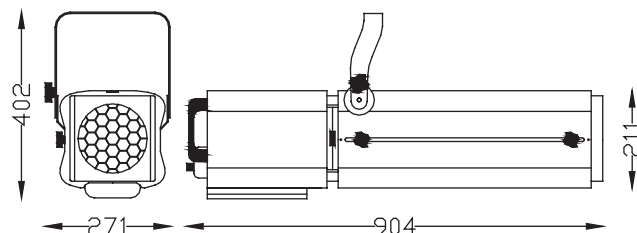

DATI TECNICI - TECHNICAL DATA



100/240V AC



200 W



1 LED COB BRIDGELUX



90



EXTRUDED ALUMINIUM + STEEL SHEETS



15,5 Kg



20



EPOXIDIC POWDER

VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	Dimensioni porta accessori Accessori frame dimensions	Dimensione gobo Gobos dimension	Ottica Optics	€
9819076605	3000K	185x185 mm	B	8° - 22°	
9819076693	5600K	185x185 mm	B	8° - 22°	

ACCESSORI - ACCESSORIES

Cod.0400000005 COLOR FRAME	Cod. 1500004900 IRIS DIAPHRAGM
Cod. 0800720005 GOBO HOLDER SIZE - B	Cod. 9184000000 SINGLE TRUSSCLAMP
Cod. 1300004505 HOOK CLAMP	Cod. 1400500000 Ø3MM STEEL SAFETY BOND

DATI FOTOMETRICI - PHOTOMETRIC DATA

FASCIO LARGO

With focused light beam - Con fascio luminoso a fuoco

Dist. m	3	5	7	9	10	12	14	15
Lux	12.083	4.350	2.219	1.343	1.088	755	555	483
Diam. m	1,3	2,2	3,1	4,0	4,4	5,3	6,2	6,6

FASCIO STRETTO

With focused light beam - Con fascio luminoso a fuoco

Dist. m	5	8	10	12	14	16	18	20
Lux	11.350	4.434	2.838	1.970	1.446	1.108	876	709
Diam. m	0,8	1,3	1,6	1,9	2,2	2,6	2,9	3,2

LED THEATRE

TRADITIONAL THEATRE

STAGE

DIMMER

CONSOLES