

# PONY FOLLOW SPOT 200 DMX

LED THEATRE

TRADITIONAL THEATRE

STAGE


DIMMER

CONSOLE



Seguipersona con sorgente a LED da 200 W con ottica 8°/22°, egolazione manuale dello zoom e del focus, comandato da segnale DMX, completo di diaframma, cambia colori, dimmer meccanico. Segnali di controllo DMX512, WIRELESS DMX (OPTIONAL). Funzioni stand-alone con controllo locale dell'intensità. Frequenza PWM regolabile da 300Hz a 4Khz. Risoluzioni del dimmer a 8 bit, conversione software 8-11 bit, 16 bit. Presa USB per aggiornamento software.

Follow spot with 200 W LED source, dmx dimming control, stand alone functions, 8°/22° optics, manual regulation of zoom and focus, complete with color frame, shutter blades, iris diaphragm & dimming shutter. Control signals: DMX512, WIRELESS DMX (optional). Stand-alone functions with local control of intensity. PWM can be set via display from 300Hz to 4Khz in not even steps. Resolution 8/ 8-11Bit conversion /16 Bit. USB port for software update.

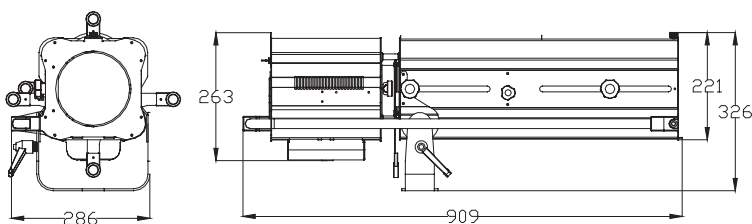

## DATI TECNICI - TECHNICAL DATA



100/240V AC



200 W



COB  
BRIDGELUX

CRI

90



EXTRUDED ALUMINIUM  
+ STEEL SHEETS



15,5 Kg

IP

20



EPOXIDIC POWDER

## VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	Dimensioni Gelatine Color Gel dimensions	Dimensione gobo Gobos dimension	Ottica Optics	€
9819115205	3000K	Ø 175 mm	B	8° - 22°	
9819116505	5600K	Ø 175 mm	B	8° - 22°	

## ACCESSORI - ACCESSORIES

Cod. 0800720005  
GOBO HOLDER SIZE - B



Cod. 3500000000  
SPIGOT ø28mm



Cod. 3600000005  
PROFESSIONAL STAND



## DATI FOTOMETRICI - PHOTOMETRIC DATA

### FASCIO LARGO

With focused light beam - Con fascio luminoso a fuoco

Dist. m	3	5	7	9	10	12	14	15
Lux	12.083	4.350	2.219	1.343	1.088	755	555	483
Diam. m	1,3	2,2	3,1	4,0	4,4	5,3	6,2	6,6

### FASCIO STRETTO

With focused light beam - Con fascio luminoso a fuoco

Dist. m	5	8	10	12	14	16	18	20
Lux	11.350	4.434	2.838	1.970	1.446	1.108	876	709
Diam. m	0,8	1,3	1,6	1,9	2,2	2,6	2,9	3,2