

## TERRA WL5 (Monochromatic)



art. 14012

### Short description

---

The stainless steel TERRA range, with its IP67 protection rating, includes LED in-ground lights suitable for outdoors installations with an high light output to create vivid colors or monochromatic sets.

- TERRA WL5 is available with 5 monochromatic LEDs (warm white, neutral white, cool white, red, green, blue). Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

### Description

---

- SOURCE: n.5 LEDs

Total out lumen: 2500lm

Total light power: 15W

- OPTIC: medium beam (38mm lenses)

On request: wide and narrow beam lens

- ELECTRIC FEATURES:

(this fixture has to work with dedicated power supply)

3x1 cable 1,5mt.

- IP RATING PROTECTION: IP67 recessed driveway

On request IP68

- MATERIALS:

- housing and trim ring in stainless steel

- thermal-shock resistant tempered safety glass

## TERRA WL5 (Monochromatic)

- DIMENSIONS: &oslash; 190 x 47,5mm - &oslash; 190 x 82mm (model with power supply on board)



art. 14091  
WL60 UN (Ultra Narrow) Monochromatic

# Studio Due

emotion and creativity in light



## WL 60 UN

monochromatic

The new WL 60 UN (ULTRA NARROW) with its smart design is the new IP67 LED Lighting fixture suitable for monochromatic applications. Utilizes high brightness LEDs combined with an high efficient optic system for a rectangular projection.

The ULTRA NARROW lenses of 4°, allow to light up objects from far away distance (more than 200 meters).

It can be supplied with different color temperature white LEDs (warm, neutral and cool) or red, green, blue LEDs.

Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR).

### TECHNICAL FEATURES

- **SOURCE**  
n. 60 (5W) White LEDs  
180W total light power  
24000 lm
- **OPTIC**  
4° ULTRA NARROW 35 mm lenses
- **CONNECTIONS**  
Main Power: 3x0,75mm cable
- **RATING PROTECTION**  
IP 67
- **POWER SUPPLY**  
Voltage range: 88-264VAC, 124-370VDC  
Frequency range: 47-63Hz  
Active Power factor: PF>0.95/230VAC, PF>0.98/115VAC  
Current: 0.7A@230VAC;  
Fuse inside Power Supply  
Power: 200W
- **PHYSICAL**  
WxDxH: 611,5x130x340 mm  
Weight: 15 Kg.




Click on the QR Code with your smartphone to go directly to the fixture website page

art. 14091  
WL60 UN (Ultra Narrow) Monochromatic

# Studio Due

emotion and creativity in light

## PHYSICAL

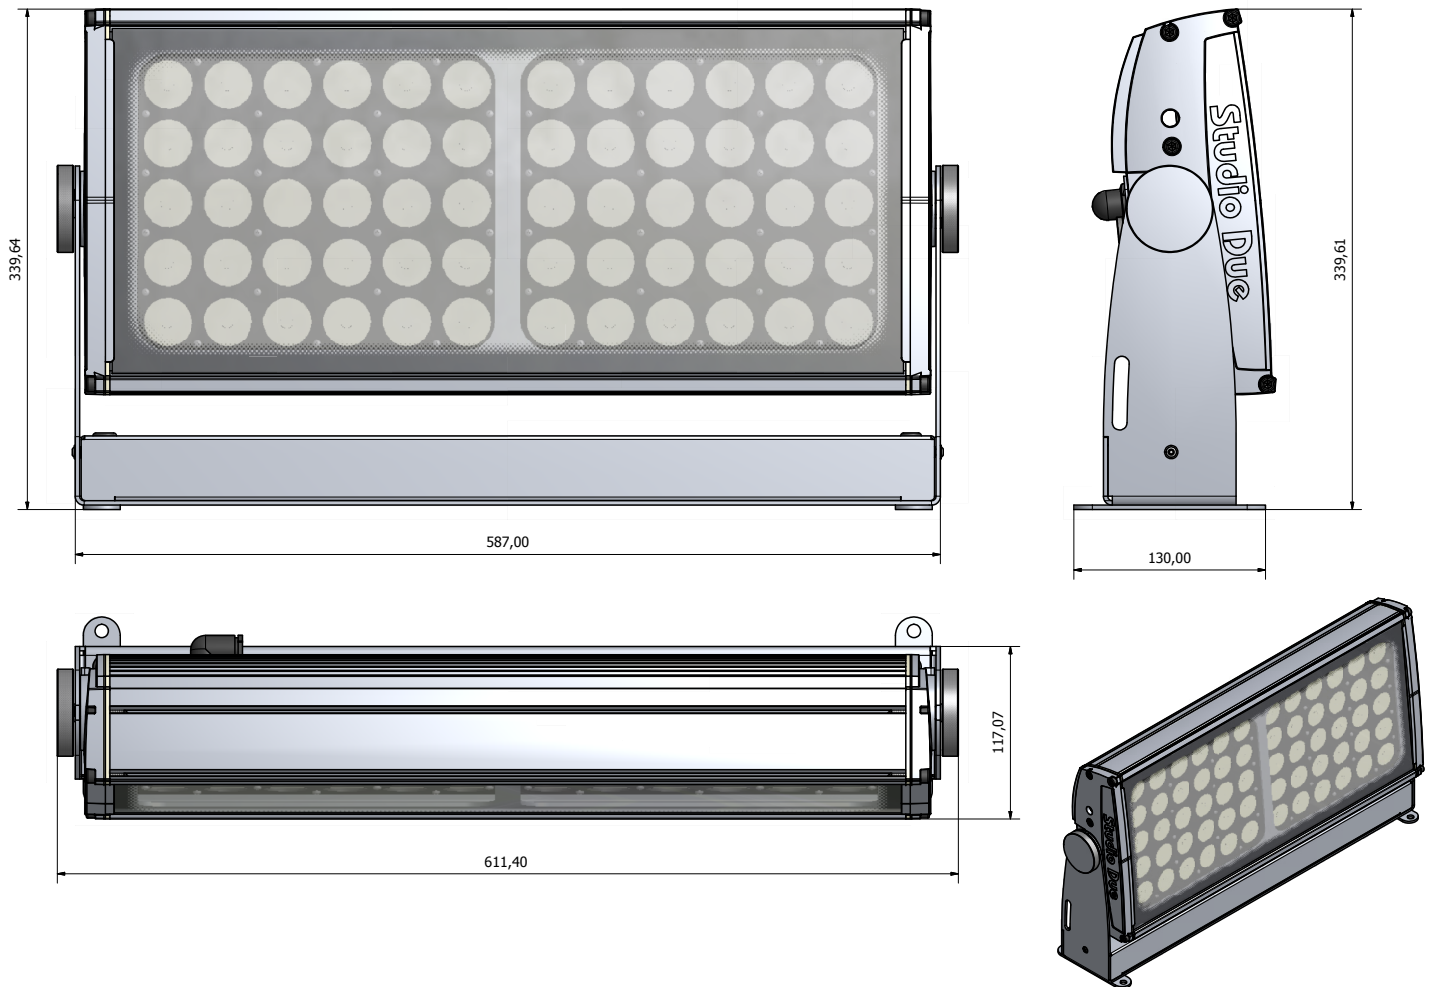

© Copyright 2014 Studio Due light srl  
Strada Poggino, 100  
01100 Viterbo (Italy)  
tel. +39.0761.352520 (4 lines)  
fax +39.0761.352653  
C.F. e P. IVA 05793121004

Specifications are subject to change without notice. Trademarks are the property of Studio Due Light Srl  
[www.studiodue.com](http://www.studiodue.com)