

# CURVA F 1200


LED THEATRE

TRADITIONAL THEATRE



Spot professionale 1000/1200W con lente fresnel  $\varnothing$ 150mm, porta-lampada GX9,5, messa a fuoco con avanzamento orizzontale elicoidale e microinterruttore di sicurezza. Completo di telaio portagelatina e rete di protezione.

Professional 1000/1200W spot with  $\varnothing$ 150mm fresnel lens, adjustable GX9.5 lamp-holder, horizontal screw focus mechanism and microswitch disconnecter. Complete with colour frame and safety guard.

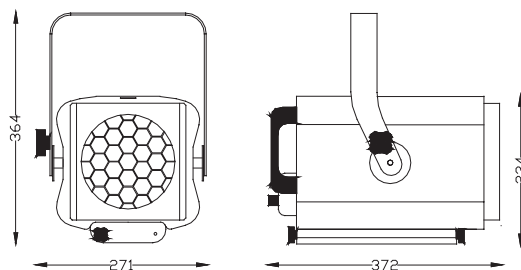

## DATI TECNICI - TECHNICAL DATA



230/240V AC



1200 W



GLASS  
 $\varnothing$  100 mm



SAFETY  
MICRO SWITCH



EXTRUDED ALUMINIUM  
+ STEEL SHEETS



6 Kg



20



GX9.5



EPOXIDIC POWDER

## VARIANTI - OPTIONS

Cod.	Dimensioni porta accessori Accessori frame dimensions	Dimensione lente frontale Frontal lens dimension	Optica Optics	€
0231031305	185x185 mm	150 mm	Fresnel 10° - 56°	

## ACCESSORI - ACCESSORIES

Cod. 0131560708 CP 90 LAMP W1200	Cod. 0130320708 T19 LAMP W1000
Cod. 0126440708 CP 67 LAMP W650	Cod. 0402003105 COLOR FRAME
Cod. 0502003105 SAFETY GUARD	Cod. 0102003105 4 LEAF BARNDOOR
Cod. 1300004505 HOOK CLAMP	Cod. 9184000000 SINGLE TRUSSCLAMP
Cod. 1400500000 $\varnothing$ 3MM STEEL SAFETY BOND	

## PHOTOMETRIC DATA

### 10° a fuoco | on focus

Dist. m	2	5	8	10	12	15	18	20
Lux	32000	5120	2000	1280	889	569	395	320
Diam. m	0,4	0,9	1,4	1,8	2,2	2,7	3,2	3,6

### 56° a fuoco | on focus

Dist. m	1	2	3	4	5	6	7	8
Lux	12800	3200	1422	800	512	356	261	200
Diam. m	1,1	2,1	3,2	4,2	5,3	6,4	7,4	8,5



STAGE

DIMMER

CONSOLE