

# MINI PONY F

LED THEATRE

TRADITIONAL THEATRE

STAGE


DIMMER

CONSOLE



Spot maneggevole dalle dimensioni compatte, con sorgente a LED da 50 W con lente fresnel, regolazione manuale dello zoom, completo di telaio porta gelatina.

Handy spotlight with small dimensions, with 50W LED source, fresnel lens, manual regulation of zoom, complete with color frame.

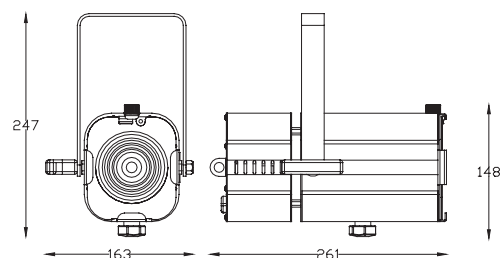

## DATI TECNICI - TECHNICAL DATA



100/240V AC



50 W



COB  
BRIDGELUX

CRI

90



EXTRUDED ALUMINIUM  
+ STEEL SHEETS



1,7 Kg

IP

20



EPOXIDIC POWDER

## VARIANTI - OPTIONS

Cod.	Temperatura Colore Color Temperature	Dimensioni porta accessori Accessori frame dimensions	Dimensione lente frontale Frontal lens dimension	Ottica Optics	€
9812035205	3000K	98x114 mm	80 mm	Fresnel 13° - 88°	
9812036505	5600K	98x114 mm	80 mm	Fresnel 13° - 88°	

## ACCESSORI - ACCESSORIES

Cod. 0100010005 4 LEAF BARNDOOR	Cod. 0400010005 COLOR FRAME
Cod. 9184000000 SINGLE TRUSSCLAMP	Cod. 1300004505 HOOK CLAMP
Cod. 1400500000 Ø3MM STEEL SAFETY BOND	

## DATI FOTOMETRICI - PHOTOMETRIC DATA

### FASCIO LARGO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	979	435	245	157	109	80	61	48
Diam. m	2,6	3,9	5,2	6,5	7,7	9,0	10,3	11,6

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	3,4	5,2	6,9	8,6	10,3	12,1	13,8	15,5
---------	-----	-----	-----	-----	------	------	------	------

### FASCIO STRETTO

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	6019	2675	1505	963	669	491	376	297
Diam. m	0,5	0,8	1,1	1,4	1,6	1,9	2,2	2,5

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Diam. m	0,9	1,3	1,7	2,1	2,6	3,0	3,4	3,8
---------	-----	-----	-----	-----	-----	-----	-----	-----