
# **Unison Heritage Consolette Station**

# **Unison Control Series**

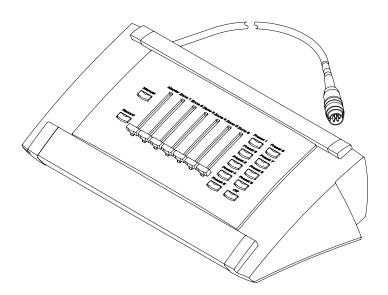

### GENERAL INFORMATION

The Unison Heritage Consolette Station is designed to provide mobility and flexibility, allowing local control from a podium, table, or other temporary position. Consolette stations interface to Unison Heritage Receptacle Stations, allowing you to move the device from one room to another, with different settings and functionality at each connection point.

### **APPLICATIONS**

- Houses of worship
- Hotels
- Convention Centers
- Meeting Rooms
- Schools
- Restaurants

### **FEATURES**

- LinkConnect using Echelon's LonTalk® protocol with LinkPower, the two wire topology-free system gives you the freedom to put stations where you need them
- ColorCondition RGB LED's allow for customized control indication on a per button basis, unlocking the conditional logic capabilities of a Paradigm control system
- Forever Legend System complimentary colored standard or custom legend options using an indelible, laser-marking method
- RemoteDirect a built in InfraRed (IR) receiver on every consolette allows for optional IR remote control at every station
- LockOut configurable control lockout from the push of a button
- Any Unison Heritage Station Faceplate (one gang or larger) can be mounted in a Portable Consolette enclosure

### **REGULATORY AND COMPLIANCE**

- cULus Listed
- CE Certified

### ORDERING INFORMATION

#### **Consolette Stations**

MODEL	DESCRIPTION				
UH100011P	1 button				
UH100021P	2 button				
UH100051P	5 button				
UH100071P	7 button				
UH100101P	10 button				
UH101001P	1 fader				
UH101011P	1 fader, 1 button				
UH101021P	1 fader, 2 button				
UH101051P	1 fader, 5 button				
UH304071P	4 fader, 7 button				
UH304121P	4 fader, 12 button				
UH407071P	7 fader, 7 button				
UH407121P	7 fader, 12 button				
UH510071P	10 fader, 7 button				
UH510121P	10 fader, 12 button				
UH613071P	13 fader, 7 button				
UH613121P	13 fader, 12 button				
UH716071P	16 fader, 7 button				
UH716121P	16 fader, 12 button				

Enter station color code in \_ space provided:

1 = Cream (RAL 9001)

4 = Black (RAL 9004)



# **Uniso Heritage Consolette Station**

# **Unison Control Series**

### SPECIFICATIONS

#### **FUNCTIONAL**

- Button functions include: preset selection, record mode activation, station lockout, raise, lower, macro activation, zone on/off control, event override and wall open/close or toggle
- Fader functions include master, zone, fade rate, or preset
- Custom button and fader functionality programmable via LightDesigner configuration software
- Programmable electronic lockout levels
- Allows for programming of individual lockout levels

### MECHANICAL

- Standard configurations with 1, 2, 5, 7 or 10 buttons, or 7 or 12 buttons and 4, 7, 10, 13 or 16 faders
- Custom configurations available, contact ETC
- Cantilevered switch arrays with removable caps
- Faceplates Constructed of injection molded, ABS plastic in two standard colors, matched to RAL standard colors
- Color matched extruded center section with injection molded ABS plastic endcaps
- 15' Attached cable with rugged connector
- Custom colors available with sample
- Indelibly marked legends in a contrasting color
- Integral RGB LED response indicator for each button and fader
- Integrated IR receiver

#### **ELECTRICAL**

 Connect to Unison receptacle stations using the LinkConnect control network over included ultra-flexible, 6 conductor cable

### **THERMAL**

- Ambient room temperature: 0-40°C / 32-104°F
- Ambient humidity: 30-90% non-condensing

### PHYSICAL

## Heritage Consolette Station Dimensions\*


GANG	HEIGHT		WIDTH (X)		DEPTH	
	in	mm	in	mm	in	mm
UH1XXXX1P	3.16	80	7.58	193	6.14	156
UH3XXXX1P	3.16	80	11.53	293	6.14	156
UH4XXXX1P	3.16	80	13.34	339	6.14	156
UH5XXXX1P	3.16	80	15.15	385	6.14	156
UH6XXXX1P	3.16	80	16.97	431	6.14	156
UH7XXXX1P	3.16	80	18.78	477	6.14	156

## Heritage Consolette Station Weights\*


MODEL	WEI	GHT	SHIPPING WEIGHT		
	lb	kg	lb	kg	
UH1XXXX1P	1.0	0.5	2.5	1.1	
UH3XXXX1P	3.4	1.5	4.9	2.2	
UH4XXXX1P	3.9	1.8	5.4	2.5	
UH5XXXX1P	4.4	2.0	5.9	2.7	
UH6XXXX1P	4.9	2.2	6.4	2.9	
UH7XXXX1P	5.4	2.5	6.9	3.1	

<sup>\*</sup>Weights and dimensions typical

Note: UHPORT40712 shown. Side dimensions typical for all stations. Please reference dimensions chart for specific width.



**TOP VIEW** 



SIDE VIEW



Corporate Headquarters • Middleton, WI USA

Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong • Singapore • New York, NY • Orlando, FL • Los Angeles, CA Copyright@2019 ETC. All Rights Reserved. All product information and specifications subject to change. Rev D 06/19
Trademark and patent info: etcconnect.com/IP